

Design of Micro Strip Stacked Patch Antenna in C-Band for Satellite and Radar Communications

A. Naga Jyothi, T. Pavani P. Ayyappa Kumar, G.V.Sai Swetha

Abstract: An analytical model of Edge Feed Micro Strip Stacked Patch Antenna (EFMSSPA) with twin slots operating at 5GHz frequency is proposed and this lies within the microwave C-band (4-8 GHz). Micro strip Patch antennas (MSPA) with simple making procedure are preferred because of light weight, low profile low volume and easy to fabricate. These are used for satellite communication, wireless communication, medical, military systems and microwave radar applications. The antenna parameters like return Loss (S_{11}), Voltage Standing Wave Ratio (VSWR), Gain and Directivity have been studied in this paper. The scale of the antenna $37.2*61.94*1.6mm^3$ has been increased by applying the Parametric Analysis. A unsighted trial and error means of analysis is take up to study the effects of twin slots on the patches. This Edge Feed Micro Strip Stacked Patch Antenna (EFMSSPA) with twin slots is designed using computer simulation Technology (CST) Microwave Studio. The CST Microwave Studio helps in understanding the features like Gain, Directivity, Return Loss (S_{11}) and Voltage Standing Wave Ratio. The design process of an EFMSSPA and EFMSPA (Edge Feed Micro strip Patch Antenna) is obtained by using FR4 Epoxy having a dielectric constant of 4.3. The Patch width (P_w) and Patch length (P_l) of an antenna are 18.43mm and 13.92mm The twin slots in the patch and stacked Patch placed with 3mm air gap above original patch increases the Return loss (S_{11}), Gain and Directivity. A comparison of EFMSPA and EFMSSPA is considered and proved that EFMSSPA exhibits good results than EFMSPA.

Keywords: Return Loss, Stacked Patch, Gain, Directivity, Micro strip Patch antennas (MSPA), Edge Feed Micro Strip Patch Antenna(EFMSPA), Edge Feed Micro Strip Stacked Patch Antenna(EFMSSPA).

I. INTRODUCTION

Antennas place a crucial role in communication systems. By definition, it is a device used to convert Radio frequency signal into an Electromagnetic wave in free space[1]. The radiating patch can be placed on one side of the dielectric substrate and ground plane on the back of the substrate to achieve the Micro Strip Patch Antenna (MSPA)[2]. The Materials of the patch are copper, gold etc and can be shape like, rectangular, circular or square type [3]. There are numerous feeding types in MSPA. The four types mainly pointed out and mostly used are micro strip line, coaxial

probe, proximity coupling and aperture coupling [4]. The proposed antenna is designed using micro strip line. The advantages are more in MSPA when compared with conventional antennas. They have low cost, less weight, low volume and easy to fabricate. Radar communication demands a light weight, low profit, low volume antennas [5].The MSPA are an individual choice. They are used in Satellite communication, wireless communication, medical and military systems. Moreover, there are several disadvantages present in the MSPA. It consists of narrow bandwidth, low efficiency and low gain.

II. PROBLEM FORMULATION

There are several methods to improve to improve efficiency and gain in MSPA. One of the technique is to change the slots and apply stacked patches to the original patch, fractal geometry and defected ground structure [6]. In this paper, twin slots are placed in the patch and stacked patch is introduced with 3mm air gap above the original patch to increase the Return Loss (S_{11}), Gain and Directivity.

III. REVIEW OF MICRO STRIP PATCH ANTENNA[MSPA]

A dielectric substrate and a ground plane are present on the either side and a radiating patch is placed on the top of the substrate and is of any shape (planar or non planar in geometry) [7]. It is a resonant antenna and is popularly printed for narrowband microwave wireless links that are required for semi hemispherical coverage [8]. It is used as elements for an array due to its ease of integration and planar configuration with micro strip technology [9]. Most commonly used micro strip antennas consists of rectangular and circular patches and are used for most demanding applications [10]. The Symmetric pattern of radiation is the main advantage of circular patch antenna and a Rectangular MSPA in its easiest form is shown in Fig 1 [11].

Revised Manuscript Received on May 18, 2019

Dr. A. Naga Jyothi, ECE, VIIT, Visakhapatnam, India.
Dr. T. Pavani, Industrialist, Ambica Mart, India.
P. Ayyappa Kumar, ECE, VIIT, Visakhapatnam, India.
G.V. Sai Swetha, ECE, VIIT, Visakhapatnam, India.

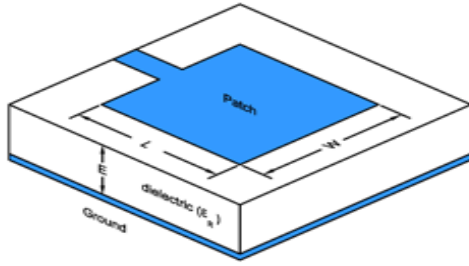


Fig 1. Micro Strip Patch Antenna

IV. DESIGN PROCEDURE

The Edge Feed Micro strip Patch Antenna (EFMSPA) and Edge Feed Micro strip Stacked Patch Antenna (EFMSSPA) with twin slots are shown in Fig 1 and Fig 3 respectively.

The design process of an EFMSPA is obtained by using FR4 Epoxy having a dielectric constant of 4.3. The thickness of the substrate is 1.6mm. The Length and Width of the Substrate are 61.9mm of 37.2mm. The Patch and Ground thickness is 0.2mm and the material for the Patch and Ground is Copper. The parameters are shown in the Table 1.

The design of an antenna is done in two ways to get the better gain and directivity.

Here the frequency considered as C-Band which is in the range of 4-8 GHz and is used in the satellite communication and radar application.

Equations (1) to (6) are the design equations using transmission line model. The following are steps to design the antenna

Step1: consider the frequency of C-Band (4- 8GHz) as resonant frequency $f_r = 5$ GHz, Thickness of the Substrate (h_t) and Relativity Permeability $s_r=4.3$ of the substrate.

Step2: To get the values of patch width (P_w) just place the values of s_r and λ_w

$$P_w = \lambda_w / 2 [(\epsilon_r + 1) / 2]^{-1/2} \tag{1}$$

Step3: To get Patch Length (P_L) after obtaining

ΔL and s_{reff}

$$P_L = 1 / [2 f_r (\epsilon_{reff})^{1/2}] \tag{2}$$

$$\epsilon_{reff} = [(\epsilon_r + 1) / 2 + (\epsilon_r - 1) / 2][1 + 12(h_t / P_w)]^{-1/2} \tag{3}$$

$$\Delta L = 0.412 \frac{[(\epsilon_{reff} + 0.3)(P_w / h_t + 0.264)]}{[(\epsilon_{reff} - 0.258)(P_w / h_t + 0.8)]}$$

Where h is the height of the substrate and W is the width of the patch.

Step4: The Location of the feed of MSPA rectangular patch antenna can be given as

$$X_{f1} = [P_L / 2(\epsilon_{reff})^{1/2}] \tag{5}$$

$$Y_{f1} = P_w / 2 \tag{6}$$

Where (X_{f1}, Y_{f1}) is the desired feed location.

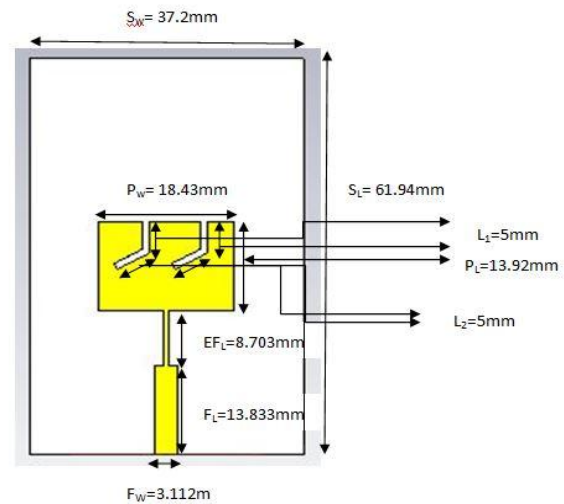


Fig 2. Edge feed MSPA (EFMSPA) with twin slots

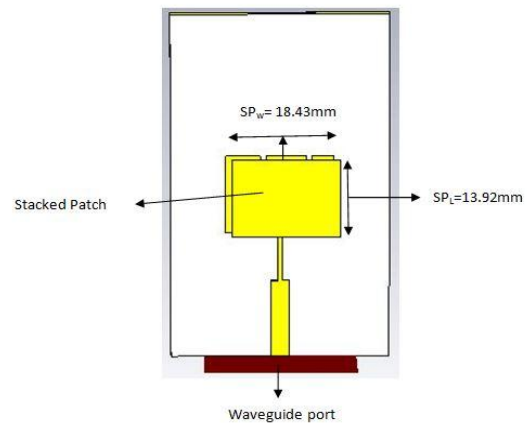


Fig 3. Edge feed Micro Strip Stacked Patch Antenna(EFMSSPA)with twin slots

The design parameters of EFMSPA are shown in Table 1. The Patch width (P_w) and Patch length (P_L) of an antenna is 18.43mm and 13.92mm. The slot lengths L_1 and L_2 are of same values 5mm with an angle of 120° from the axis XY.

Table I: Parameters of EFMSPA with Twin Slots

Description	Parameters	Dimensions(m m)
Substrate Width	S_w	37.2
Substrate Length	S_L	61.94
Patch Width	P_w	18.43
Patch Length	P_L	13.92
Slots	L_1	5
	L_2	5
Width of Feed Line	F_w	3.112
Length of Feed Line	F_L	13.833
Effective Feed Length	EF_L	8.703
Effective Feed Width	EF_w	0.753
Ground Width	G_w	37.2
Ground Length	G_L	61.94
Stacked Patch Length	SP_L	13.92
Stacked Patch Width	SP_w	18.43
Air Gap Patch & Stacked Patch	AG	3
Height of the Substrate	ht	1.6

V. SIMULATION RESULTS

CST Microwave Studio is used as a design tool for MSPA. The CST tool designer can implement the antenna and it also helps in understanding the features like Gain, Directivity, Return Loss (S_{11}) and Voltage Standing Wave Ratio. Fig 4 shows the Return Loss (S_{11}) of Edge Feed Micro strip Patch Antenna (EFMSPA) with twin slots at 4.56GHz is -21.5179. Fig 5 shows the Return Loss (S_{11}) of Edge Feed Micro strip Stacked Patch Antenna (EFMSSPA) with twin slots at 4.53GHz is -32.7604.

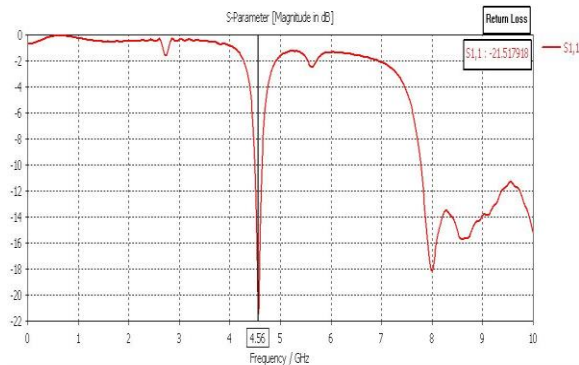


Fig 4. Return loss (S11) of EFMSPA with twin slots

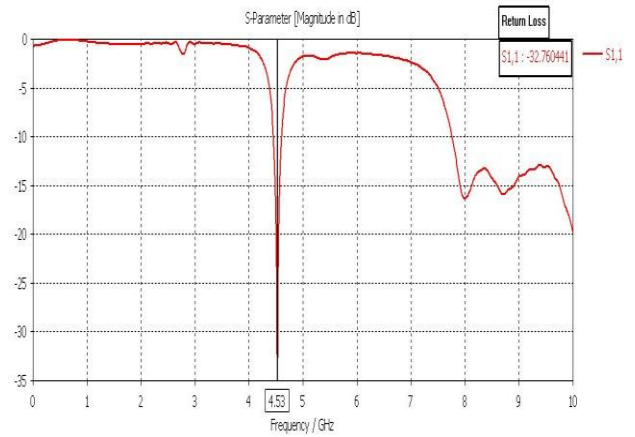


Fig 5. Return loss (S11) of EFMSSPA with twin slots

The Comparisons of both EFMSPA and Edge Feed Micro strip Stacked Patch Antenna with twin slots are shown in Fig 6.

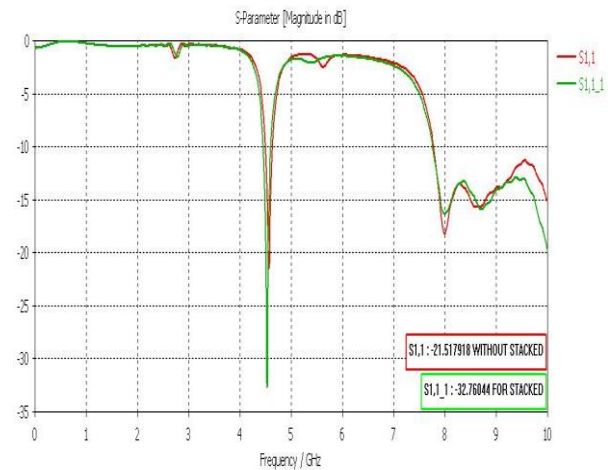


Fig 6. Return Loss comparison of EFMSPA and EFMSSPA with twin slots

The VSWR Results for EFMSPA and Edge Feed Micro strip Stacked Patch Antenna (EFMSSPA) with twin slots are shown in Fig 7 and Fig 8 respectively.

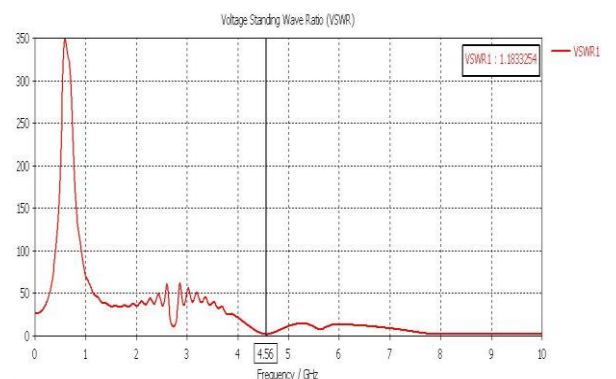


Fig 7. VSWR for EFMSPA with twin slots



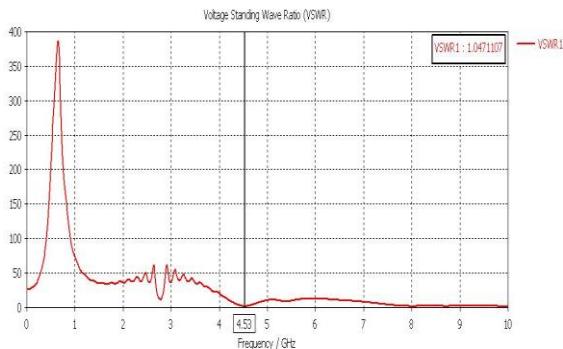


Fig 8. VSWR for EFMSSPA with twin slots

Comparisons of VSWR for both the results are shown in Fig 9.

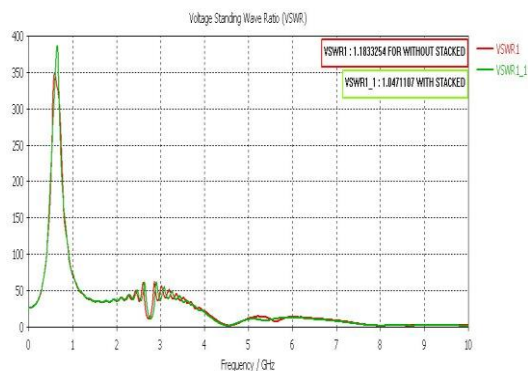


Fig 9. Comparison results of VSWR EFMSSPA and EFMSSPA with twin slots

The Three Dimensional Radiation Pattern of Gain is shown in Fig 8. The high Gain obtained for Edge Feed Micro strip Stacked Patch Antenna (EFMSSPA) is 5.04db compared with EFMSSPA having twin slots is 3.28db. These are shown in Fig 10 and 11:


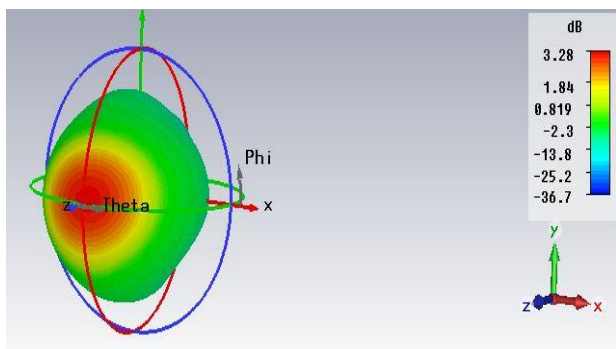


Fig 10: EFMSSPA 3D Gain pattern with twin slots

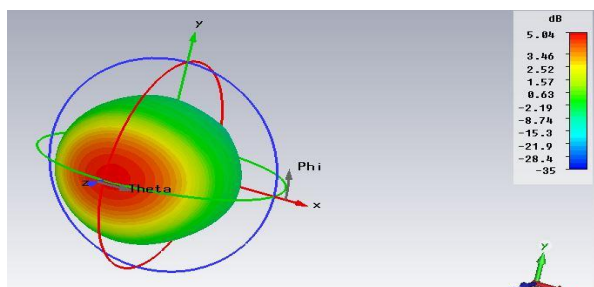

FFig 11 : EFMSSPA 3D Gain Pattern with twin slots

The Directivity of the EFMSSPA and Edge Feed Micro strip Stacked Patch Antenna (EFMSSPA) with twin slots are 7.61dbi and 8.29dbi and are shown in Fig 12 and 13.

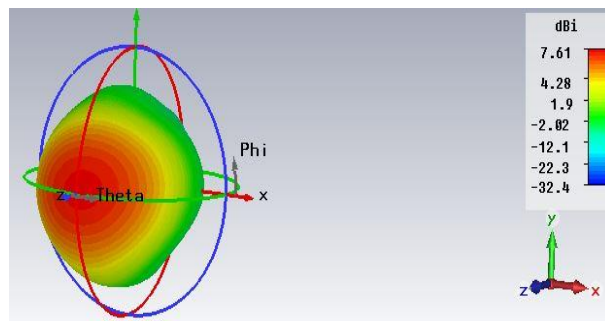


Fig 12: EFMSSPA Directivity Pattern with twin slots

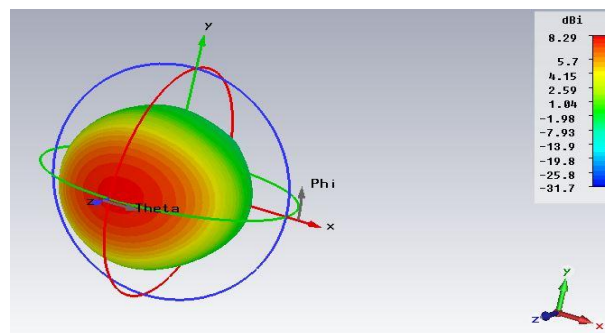


Fig 13: EFMSSPA Directivity Pattern with twin slots

From the Graphs, the values can be easily described. The central frequency of an antenna is around 5GHz which is lies in the C-band. The return loss of the EFMSSPA is -21.5179dB and Edge Feed Micro strip Stacked Patch Antenna (EFMSSPA) with twin slots is -32.7604.

It can be stated that the Return Loss (S_{11}) is improved. The VSWR has also improved by 1.1833 to 1.047. Maximum Gain 5.04db and is obtained by Stacked EFMSA. Directivity is also increased with 8.29dbi.

VI. COMPARATIVE ANALYSIS

The Performance Comparison of Return Loss (S_{11}), VSWR, Gain and Directivity for EFMSSPA and Edge Feed Micro strip Stacked Patch Antenna with twin slots are tabulated as follows in Table 2.

Table 2. Comparison of S_{11} , VSWR, Gain and Directivity

Parameters	EFMSSPA with twin slots	Edge Feed Micro strip Stacked Patch Antenna with twin slots
Frequency	4.56GHz	4.53GHz
Return Loss (S_{11})	-21.5179	-32.7604
VSWR	1.1833	1.047
Gain	3.28db	5.04db
Directivity	7.61dbi	8.29dbi

VII. CONCLUSION

Here in this project the Stacked Edge Feed Micro strip Patch Antenna operating at C-band with 5GHz as central frequency has given the desirable features. The twin slots in the patch and stacked Patch placed with 3mm air gap above original patch increases the Return loss (S_{11}), Gain and Directivity. A comparison of EFMSPA and EFMSSPA is considered and proved that EFMSSPA exhibits good results than EFMSPA. Gain and directivity values of these antennas are 5.04db and 8.29dbi at 4.53GHz frequency. The Return Loss (S_{11}) of Edge Feed Micro strip Stacked Patch Antenna is -32.7604. Hence it can be used in the Satellite Communication and Radar Applications. Endower

ACKNOWLEDGEMENT

This work is being supported by Ministry of Science & Technology, of Science and Engineering Research Board (SERB), with the Grant No: ECR 2017-000256 dated 15/07/2017.

REFERENCES

1. Stutzman, Warren L., and Gary A. Thiele. *Antenna theory and design*. John Wiley & Sons, 2012.
2. James, James R., and Peter S. Hall, eds. *Handbook of microstrip antennas*. Vol. 1. IET, 1989.
3. Deshmukh, Amit A., A. A. Kadam, and K. P. Ray. "Analysis of slot cut broadband and dual-band rectangular microstrip antennas." *IETE Journal of Research* 59.3 (2013): 193-200.
4. Sainati, Robert A. *CAD of microstrip antennas for wireless applications*. Artech House, Inc., 1996.
5. Munson, Robert E., Hussain A. Haddad, and John W. Hanlen. "Microstrip reflectarray for satellite communication and radar cross-section enhancement or reduction." U.S. Patent No. 4,684,952. 4 Aug. 1987.
6. Ang, Boon-Khai, and Boon-Kuan Chung. "A wideband E-shaped microstrip patch antenna for 5-6 GHz wireless communications." *Progress In Electromagnetics Research* 75 (2007): 397-407.
7. Pozar, David M. "Microstrip antennas." *Proceedings of the IEEE* 80.1 (1992): 79-91.
8. Alamouti, Siavash M. "A simple transmit diversity technique for wireless communications." *IEEE Journal on selected areas in communications* 16.8 (1998): 1451-1458.
9. Salonen, Pekka, Mikko Keskilammi, and Markku Kivikoski. "New slot configurations for dual-band planar inverted-F antenna." *Microwave and Optical Technology Letters* 28.5 (2001): 293-298.
10. Balanis, Constantine A. *Antenna theory: analysis and design*. John Wiley & Sons, 2016.
11. Hirasawa, Kazuhiro, and Misao Haneishi, eds. *Analysis, design, and measurement of small and low-profile antennas*. Artech House on Demand, 1992.

AUTHORS PROFILE



Dr. A. Naga Jyothi was born in 1982 at Visakhapatnam. She received her B.Tech (ECE) from Nagarjuna University and M.Tech(Radar & Microwave Engineering) from Andhra University College of Engineering(A). She completed Ph.D in Radar Signal Processing from Andhra University College of Engineering (A). She has a teaching and research experience of 12 years. Presently working as an Associate Professor in the department of ECE, VIIT, Visakhapatnam. She has published papers in various National , International journals and conferences. Her areas of interest include Radars, Antennas and Nano technology. Completed project sanctioned under WoS-A. Presently working for a project sanctioned under ECRA –SERB New Delhi with sanction order no. ECR 2017-000256 DATED 15/07/2017.



Dr. T. Pavani received her AMIE with first class from The Institution of Engineers (India), M.Tech and Ph.D. from Andhra University College of Engineering, Andhra University. She is having 10 years of teaching and research experience. Her areas of interest are Antennas, Electromagnetics, EMI/EMC and Applications of Soft computing. She is a life member of Institution of Engineers and SEMCE.



P. Ayyappa Kumar was born in 1991 at Visakhapatnam. He received his B.Tech Electronics and Communication Engineering from Kaushik College of Engineering in 2013 and M.Tech in (Digital Electronics and Communication Systems) from Vignan's Institute of Information technology in 2016. His areas of interest are Antennas and Communications.



G.V. Sai Swetha was born in 1991 in Visakhapatnam. She received her B.Tech degree in ECE from NSRIT, Visakhapatnam in 2009-13. M.Tech in VLSI from BITS, Visakhapatnam in 2014-16. Presently working as SRF in a project sanctioned by Science And Engineering Research Board (SERB), with the grant no: ecr 2017-000256 dated 15/07/2017.