



## JARMR3288W-2N




<b>Form Factor</b>	3.5" Form Factor (148 x 102mm)	<b>Expansion Slot</b>	1* Mini PCIe (USB interface)
<b>Processor/ CPU</b>	Rockchip RK3288W Cortex A17 1.8GHz Quad-core processor	<b>External I/O</b>	1* HDMI, 1* RJ45, 1* Audio, 2* USB2.0 (USB2 Support OTG), 1* DC-in
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 64GB)	<b>Internal I/O</b>	1* eDP, 1* LVDS, 1* MIPI CSI, 4* USB2.0, 4* COM, 1* GPIO
<b>Graphic</b>	HDMI / LVDS / eDP	<b>Power</b>	12V DC-in
<b>Resolution</b>	2560 x 1600@60Hz	<b>O.S Support</b>	Android 5.1, Linux 4.4

## JARMR3288WM-2N




<b>Form Factor</b>	3.5" Form Factor (148 x 102mm)	<b>Expansion Slot</b>	1* Mini PCIe (USB interface)
<b>Processor/ CPU</b>	Rockchip RK3288W Cortex A17 1.8GHz Quad-core processor	<b>External I/O</b>	1* HDMI, 1* RJ45, 1* Audio, 2* USB2.0 (USB2 Support OTG), 1* DC-in
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 64GB)	<b>Internal I/O</b>	1* eDP, 1* LVDS, 1* MIPI DSI, 4* USB2.0, 4* COM, 1* GPIO
<b>Graphic</b>	HDMI / LVDS / eDP / MIPI	<b>Power</b>	12V DC-in
<b>Resolution</b>	2560 x 1600@60Hz	<b>O.S Support</b>	Android 5.1, Linux 4.4

## JARMR3328A-2N




<b>Form Factor</b>	uTX Form Factor (120 x 130mm)	<b>Expansion Slot</b>	N/A
<b>Processor/ CPU</b>	Rockchip RK3328 Cortex A53 1.5GHz Quad-core Processor	<b>External I/O</b>	1* HDMI, 2* RJ45, 4* USB3.0, 1* USB2.0, 1* OTG, 1* Audio, 1* DC-in
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	N/A
<b>Graphic</b>	HDMI	<b>Power</b>	12V DC-in
<b>Resolution</b>	3840 x 2160@60Hz	<b>O.S Support</b>	Android 7.1, Linux 4.4

## JR3328B-2N



<b>Form Factor</b>	uTX Form Factor (120 x 130mm)	<b>Expansion Slot</b>	1* mSATA, 1* Mini PCIe (USB Interface)
<b>Processor/ CPU</b>	Rockchip RK3328 ARM Cortex A53 1.5GHz Quad-core Processor	<b>External I/O</b>	1* HDMI, 2* RJ45, 3* USB3.0, 2* USB2.0, 1* OTG, 1* Audio, 1* DC-in
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	2* USB2.0, 1* RS232, 1* SATA connector
<b>Graphic</b>	HDMI	<b>Power</b>	12V DC-in
<b>Resolution</b>	3840 x 2160@60Hz	<b>O.S Support</b>	Android 7.1, Linux 4.4


## JR3128-1A



<b>Form Factor</b>	2.5" Form Factor (100 x 72mm)	<b>Expansion Slot</b>	1* Mini PCIe (USB interface)
<b>Processor/ CPU</b>	Rockchip RK3128 ARM Cortex A7 1.2GHz Quad-core Processor	<b>External I/O</b>	1* HDMI, 1* RJ45, 2* USB2.0, 1* OTG, 1* Audio, 1* DC-in, 1* Micro SD Socket
<b>Memory</b>	Onboard 1GB DDR3L DRAM (Max 2GB) 4GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	1* LVDS, 1* MIPI CSI, 1* USB2.0, 1* GPIO, 1* Speaker Out, 1* RS232
<b>Graphic</b>	1* HDMI /LVDS/MIPI (Option)	<b>Power</b>	12V DC-in
<b>Resolution</b>	1920 x 1080@60Hz	<b>O.S Support</b>	Android 5.1, Linux 4.4


# ARM-Based Motherboard Series

## JR3288WCPB-2N




<b>Form Factor</b>	1.8" Form Factor (85 x 56mm)	<b>Expansion Slot</b>	N/A (By IO Board)
<b>Processor/</b>	Rockchip RK3288W Cortex A17	<b>External I/O</b>	N/A (By IO Board)
<b>CPU</b>	1.8GHz Quad-core processor		
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	2* Mixture Headers
<b>Graphic</b>	2* MIPI	<b>Power</b>	12V DC-in
<b>Resolution</b>	1920 x 1080@60Hz	<b>O.S Support</b>	Android 5.1, Linux 4.4

## JR3328-DG2N

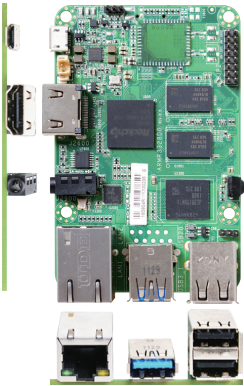


<b>Form Factor</b>	1.8" Form Factor (85 x 56mm)	<b>Expansion Slot</b>	N/A
<b>Processor/</b>	Rockchip RK3328 ARM Cortex A53	<b>External I/O</b>	1* HDMI, 1* RJ45, 1* USB3.0,
<b>CPU</b>	1.5GHz Quad-core Processor		2* USB2.0, 1* OTG, 1* Audio
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	10bit GPIO
<b>Graphic</b>	HDMI	<b>Power</b>	5V DC-in
<b>Resolution</b>	3840 x 2160 @60Hz	<b>O.S Support</b>	Android 7.1, Linux 4.4

## JR3328-DG2NL

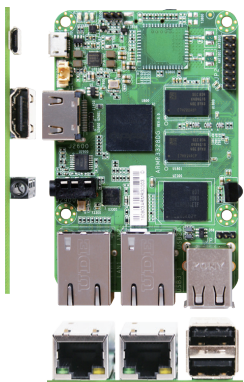

<b>Form Factor</b>	1.8" Form Factor (85 x 56mm)	<b>Expansion Slot</b>	N/A
<b>Processor/</b>	Rockchip RK3328 ARM Cortex A53	<b>External I/O</b>	1* HDMI, 2* RJ45, 2* USB2.0,
<b>CPU</b>	1.5GHz Quad-core Processor		1* OTG, 1* Audio
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	10bit GPIO
<b>Graphic</b>	HDMI	<b>Power</b>	5V DC-in
<b>Resolution</b>	3840 x 2160 @60Hz	<b>O.S Support</b>	Android 7.1, Linux 4.4

## JR3288-DG2N

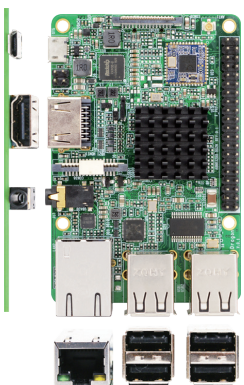

<b>Form Factor</b>	1.8" Form Factor (85 x 56mm)	<b>Expansion Slot</b>	N/A
<b>Processor/</b>	Rockchip RK3288W ARM Cortex	<b>External I/O</b>	1* HDMI, 1* RJ45, 4* USB2.0,
<b>CPU</b>	A17 1.8GHz Quad-core Processor		1* OTG, 1* Audio
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) 8GB Flash ROM (Max 32GB)	<b>Internal I/O</b>	26bit GPIO
<b>Graphic</b>	HDMI	<b>Power</b>	5V DC-in
<b>Resolution</b>	1920 x 1080 @60Hz	<b>O.S Support</b>	Android 5.1, Linux 4.4

## HBJC920R3288-2N



<b>Form Factor</b>	3.5" SBC Form Factor	<b>Rear Panel I/O</b>	1* RJ45, 1* HDMI, 1* Audio Jack, 1* USB2.0, 1* OTG (Option USB2.0), 1* RS485, 1* Micro SD Socket, 1* Power button, 1* SIM Card Socket, 1* 12V DC-Jack
<b>Processor/CPU</b>	Rockchip ARM Cortex A17 RK3288 1.8GHz Quad-core Processor	<b>Front Panel I/O</b>	2* Antenna hole
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) Onboard 8G Flash ROM (Max 32GB)	<b>Power</b>	DC12V-5.0A AC 90~240V input
		<b>Dimensions</b>	190 x 115.0 x 22mm
		<b>O.S Support</b>	Android 5.1

## HBJC921R3288-2N



<b>Form Factor</b>	3.5" SBC Form Factor	<b>Rear Panel I/O</b>	1* RJ45, 1* HDMI, 1* Audio Jack, 1* USB2.0, 1* OTG (Option USB2.0), 1* RS485, 1* Micro SD Socket, 1* Power button, 1* SIM Card Socket, 1* 12V DC-Jack
<b>Processor/CPU</b>	Rockchip ARM Cortex A17 RK3288 1.8GHz Quad-core Processor	<b>Front Panel I/O</b>	2* Antenna hole, 1* Total switch control
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) Onboard 8G Flash ROM (Max 32GB)	<b>Power</b>	DC12V-5.0A AC 90~240V input
		<b>Dimensions</b>	190 x 115.0 x 22mm
		<b>O.S Support</b>	Android 5.1

## HBJC923R3328DG2NL



<b>Form Factor</b>	1.8" SBC Form Factor	<b>Rear Panel I/O</b>	1* GbE, 1* 10/100M LAN, 2* USB2.0
<b>Processor/CPU</b>	Rockchip ARM Cortex A53 RK3328 1.5GHz Quad-core Processor	<b>Side Panel I/O</b>	1* OTG/DC-in, 1* HDMI, 1* Line-out, 1* Micro SD Socket
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) Onboard 8G Flash ROM (Max 32GB)	<b>Power</b>	DC 5V-3.0A AC 100~240V input
		<b>Dimensions</b>	94.4 x 60.5 x 33.6mm
		<b>O.S Support</b>	Android 7.1

## HBJC923R3328DG2NS



<b>Form Factor</b>	1.8" SBC Form Factor	<b>Rear Panel I/O</b>	1* RJ45, 1* USB3.0, 2* USB2.0
<b>Processor/CPU</b>	Rockchip ARM Cortex A53 RK3328 1.5GHz Quad-core Processor	<b>Side Panel I/O</b>	1* OTG/DC-in, 1* HDMI, 1* Line-out, 1* Micro SD Socket
<b>Memory</b>	Onboard 2GB DDR3L DRAM (Max 4GB) Onboard 8G Flash ROM (Max 32GB)	<b>Power</b>	DC 5V-3.0A AC 100~240V input
		<b>Dimensions</b>	94.4 x 60.5 x 33.6mm
		<b>O.S Support</b>	Android 7.1

\* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

### Jetway Information Co., Ltd.

9F., No.207, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 23143, Taiwan

Tel: +886-2-89132711

Mail: support\_team@jetway.com.tw

### China - Dongguan Branch

No. 605, 8th Commercial Office Building, Vanke Center, Changqing South Road, Changan, Dongguan City, 511700, China

Tel: +86-769-2101-8010

Mobile : +86-138-2880-2876

Mail: support\_team@jetway.com.tw

### USA - Jetway Computer Corp.

8058 Central Ave, Newark, CA 94560, USA

Tel: +1-510-857-0130

Mail: sales@jetwaycomputer.com

