


MF04

3.5" Elkhart Lake Industrial Motherboard 2 Intel LAN / 2 HDMI / eDP/LVDS / 12-24V



Features

1. Long-Life Embedded Class Industrial Motherboard with Planned Lifecycle Through Q1'2036
2. CPU Mounted on Bottom of Motherboard for Easy Integration into Fanless Systems
3. Intel Celeron J6412 Quad-Core, SOC Processor
4. Supports DDR4-3200 SODIMM up to 32GB Total
5. 2 * HDMI 4K@60Hz, LVDS/eDP 4K @60Hz
6. 1 * Intel Gigabit LAN, 1 * Intel 2.5GbE LAN, HD Audio
7. 1 * SATA3 6Gb/s, 1 * M.2 SATA/PCIE x2 2242/2280
8. 1 * M.2 3042 B-key with SIM Card Slot
9. 3 * USB 3.1 Gen2, 5 * USB 2.0 Ports
10. 2 * Serial Ports, 8-bit GPIO, Watchdog Timer
11. 12-24V DC-In Jack or 2-pin Alternate internal Connector
12. 3.5" SBC Form Factor (148mm x 102mm)

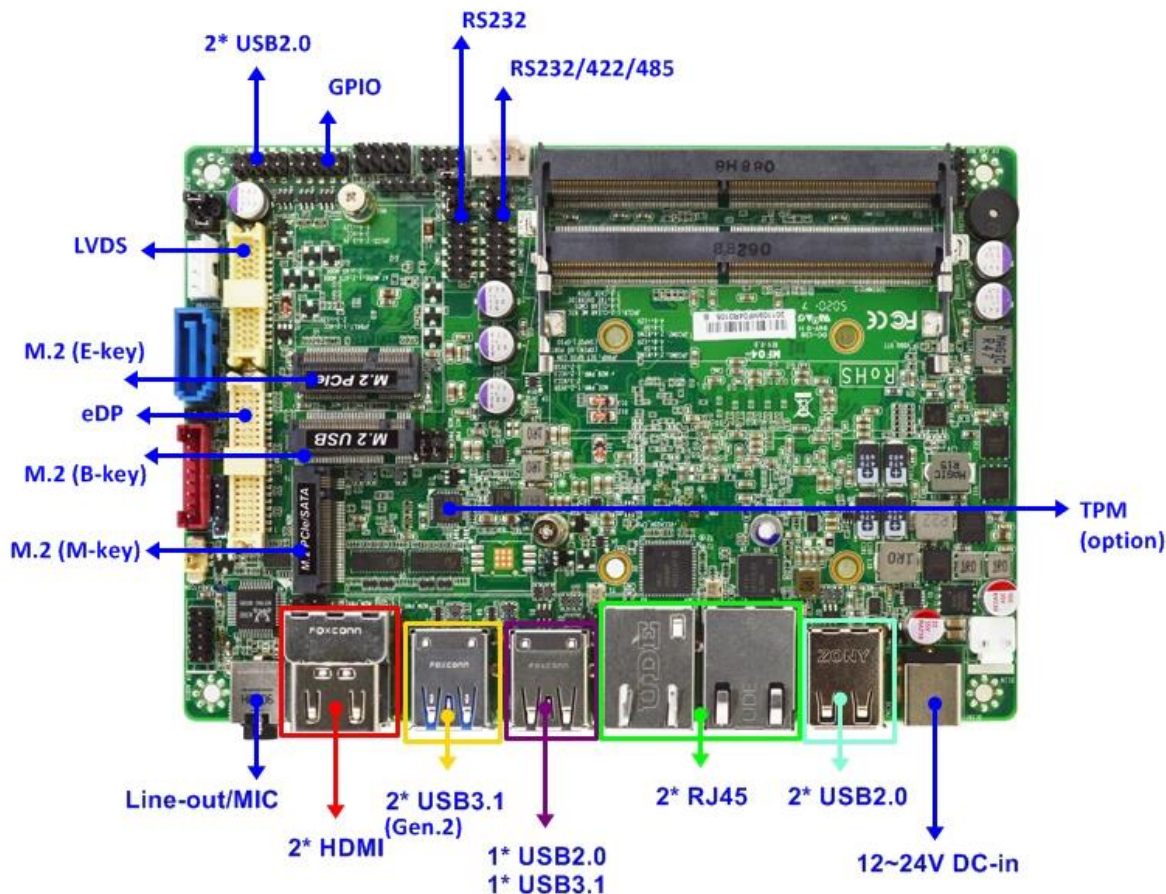

Model / Series	<ul style="list-style-type: none"> MF04
Part No	<ul style="list-style-type: none"> MF04-03 (J6412), MF04-07 (J6412, TPM 2.0) MF04-33 (N6210), MF04-37 (N6210, TPM 2.0)
Processor	<ul style="list-style-type: none"> Intel Celeron J6412 Quad-core SoC (OEM Option: Intel N6210 Dual-core) *Ships with flat aluminum heatsink for direct attach
Chipset	<ul style="list-style-type: none"> SoC
Video	<ul style="list-style-type: none"> Intel UHD Graphics for 10th Gen Intel Processors
Memory	<ul style="list-style-type: none"> 2 * 260-pin SO-DIMM slot supporting DDR4-3200 up to 32GB total
Expansion Slots	<ul style="list-style-type: none"> 1 * M.2 2230 E-key (CNVI) 1 * M.2 3042 B-key with SIM card holder
Storage	<ul style="list-style-type: none"> 1 * SATA3 6Gb/s port, 1 * M.2 M-key SATA * PCIE 3.0 x2 NVME 2242/2280
Audio	<ul style="list-style-type: none"> Realtek HD audio
Network	<ul style="list-style-type: none"> 1 * Intel i225-LM 2.5GbE LAN, 1 * Intel i211-AT Gigabit LAN
Other Features	<ul style="list-style-type: none"> Support ACPI S3, AHCI, CPU Smart FAN, Watchdog Timer 10-255 min/sec, Optional TPM
Rear Panel I/O	<ul style="list-style-type: none"> 3 * USB 3.1 Gen2 ports, 3 * USB 2.0 ports 2 * RJ-45 LAN ports 2 * HDMI 4K @60Hz Line-out/Mic combo jack, SIM card slot +12-24V DC-in jack (2.5mm ID/5.5mm OD)
Front Panel I/O	<ul style="list-style-type: none"> None
Internal I/O	<ul style="list-style-type: none"> 1 * USB Header for 2 * USB 2.0 ports 2 * Serial headers (1 * RS232, 1 * RS232/422/485) SMBus, eDP 4K @60Hz, LVDS 1080P 8-bit GPIO header, AT/ATX power switch mode jumper 2-pin 12-24V Alternative power connector
BIOS	<ul style="list-style-type: none"> AMI Flash ROM
Box Contents	<ul style="list-style-type: none"> MF04 Motherboard
Certification	<ul style="list-style-type: none"> CE, FCC, RoHS, ErP
Temperature	<ul style="list-style-type: none"> Operating Temperature 0~60 ° C, Storage Temperature -20-85 ° C
Form Factor	<ul style="list-style-type: none"> 3.5" SBC Form Factor (148mm x 102mm)
Warranty	<ul style="list-style-type: none"> 2 Years Limited Warranty

*Specifications subject to change without notice, not responsible for typographical errors.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

