

2.5" SATA SSD

3TG6-P Series

Customer: _____

Customer

Part

Number: _____

Innodisk

Part

Number: _____

Innodisk

Model Name: _____

Date: _____

Innodisk Approver	Customer Approver

Table of contents

LIST OF FIGURES	6
1. PRODUCT OVERVIEW	7
1.1 INTRODUCTION OF INNODISK 2.5" SATA SSD 3TG6-P	7
1.2 PRODUCT VIEW AND MODELS.....	7
1.3 SATA INTERFACE	8
1.4 2.5-INCH FORM FACTOR.....	8
2. PRODUCT SPECIFICATIONS.....	9
2.1 CAPACITY AND DEVICE PARAMETERS	9
2.2 PERFORMANCE.....	9
2.3 ELECTRICAL SPECIFICATIONS.....	9
2.3.1 Power Requirement	9
2.3.2 Power Consumption	10
2.4 ENVIRONMENTAL SPECIFICATIONS	10
2.4.1 Temperature Ranges	10
2.4.2 Humidity.....	10
2.4.3 Shock and Vibration	10
2.4.4 Mean Time between Failures (MTBF).....	10
2.5 CE AND FCC COMPATIBILITY	11
2.6 RoHS COMPLIANCE	11
2.7 RELIABILITY	11
*NOTE:	11
1. SEQUENTIAL: MAINLY SEQUENTIAL WRITE, TESTED BY VDBENCH.....	11
2. CLIENT: FOLLOW JESD218 TEST METHOD AND JESD219A WORKLOAD, TESTED BY ULINK. (THE CAPACITY LOWER THAN 64GB CLIENT WORKLOAD IS NOT SPECIFIED IN JEDEC219A, THE VALUES ARE ESTIMATED.).....	11
3. BASED ON OUT-OF-BOX PERFORMANCE.....	11
2.8 TRANSFER MODE	11
2.9 PIN ASSIGNMENT	11
2.10 MECHANICAL DIMENSIONS	13
* DGS25-04TM71EXAQF.....	13
2.11 ASSEMBLY WEIGHT	15
2.12 SEEK TIME	15
2.13 HOT PLUG.....	15
2.14 NAND FLASH MEMORY	15
3. THEORY OF OPERATION	16
3.1 OVERVIEW.....	16
3.2 SATA CONTROLLER	16
3.3 ERROR DETECTION AND CORRECTION	17

3.4 WEAR-LEVELING	17
3.5 BAD BLOCKS MANAGEMENT	17
3.6 iDATA GUARD	17
3.7 GARBAGE COLLECTION/TRIM	17
3.8 iCELL TECHNOLOGY (OPTIONAL).....	18
3.9 iPOWER GUARD.....	18
3.10 QUICK ERASE.....	18
4. INSTALLATION REQUIREMENTS	19
4.1 2.5" SATA SSD 3TG6-P PIN DIRECTIONS	19
4.2 ELECTRICAL CONNECTIONS FOR 2.5" SATA SSD 3TG6-P	19
4.3 FORM FACTOR.....	20
4.4 DEVICE DRIVE	20
5. SMART FEATURE SET	21
6. PART NUMBER RULE	23

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	July, 2018
Preliminary 0.1	Add performance and housing drawing for 4TB	Aug., 2018
Rev 1.0	Add TBW information	Sep., 2018
Rev 1.1	Modify Performance Table for 2TB and 4TB	Dec., 2018
Rev 1.2	Add Quick Erase Operation	Dec., 2018
Rev 1.3	Modify Mechanical Dimensions Modify LBA for 4TB Delete DEVSLP & Slumber Mode on Power Consumption Table	Jan., 2019

List of Tables

TABLE 1: DEVICE PARAMETERS	9
TABLE 2: PERFORMANCE	9
TABLE 3: INNODISK 2.5" SATA SSD 3TG6-P POWER REQUIREMENT.....	9
TABLE 4: POWER CONSUMPTION	10
TABLE 5: TEMPERATURE RANGE FOR 2.5" SATA SSD 3TG6-P	10
TABLE 6: SHOCK/VIBRATION TESTING FOR 2.5" SATA SSD 3TG6-P	10
TABLE 7: 2.5" SATA SSD 3TG6-P MTBF.....	10
TABLE 8: INNODISK 2.5" SATA SSD 3TG6-P PIN ASSIGNMENT.....	12

List of Figures

FIGURE 1: INNODISK 2.5" SATA SSD 3TG6-P	7
FIGURE 2: INNODISK 2.5" SATA SSD 3TG6-P BLOCK DIAGRAM	16
FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT	19

1. Product Overview

1.1 Introduction of Innodisk 2.5" SATA SSD 3TG6-P

Innodisk 2.5" SATA SSD 3TG6-P products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk 2.5" SATA SSD 3TG6-P is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. The SSD have good performance, no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

1.2 Product View and Models

Innodisk 2.5" SATA SSD 3TG6-P is available in follow capacities:

2.5" SATA SSD 3TG6-P 128GB	2.5" SATA SSD 3TG6-P 256GB
2.5" SATA SSD 3TG6-P 512GB	2.5" SATA SSD 3TG6-P 1TB
2.5" SATA SSD 3TG6-P 2TB	2.5" SATA SSD 3TG6-P 4TB



Figure 1: Innodisk 2.5" SATA SSD 3TG6-P

1.3 SATA Interface

Innodisk 2.5" SATA SSD 3TG6-P supports SATA III interface, and backward compliant with SATA I and SATA II.

1.4 2.5-inch Form Factor

The Industry-standard 2.5-inch form factor design with metal material case is easy for installation, which has a compact design 69.85mm (W) x 100.00mm (L) x 6.90mm (H)

2. Product Specifications

2.1 Capacity and Device Parameters

2.5" SATA SSD 3TG6-P device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
128GB	214906608	16383	16	63	104934
256GB	468862128	16383	16	63	228936
512GB	937703088	16383	16	63	457862
1TB	1875385008	16383	16	63	915715
2TB	3750748848	16383	16	63	1831420
4TB	7501497696	16383	16	63	3662840

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance

Capacity	128GB	256GB	512GB	1TB	2TB	4TB
Sequential* Read (max.)	560	560	560	530	550	500
Sequential Write (max.)	135	285	525	460	475	450
4KB Random Read (QD32)	42000	80000	87000	87000	87000	66000
4KB Random Write (QD32)	37000	56000	70000	70000	66000	50000

Note: * Sequential performance based on CrystalDiskMark 5.1.2 with file size 1000MB

** Random performance based on IOmeter with Queue Depth 32

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: Innodisk 2.5" SATA SSD 3TG6-P Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Power Consumption

Mode	Power Consumption
Read	TBD
Write	TBD
Idle	TBD

* Target: 2.5" SATA SSD 3TG6-P 256GB

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for 2.5" SATA SSD 3TG6-P

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for 2.5" SATA SSD 3TG6-P

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various 2.5" SATA SSD 3TG6-P configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.
-

Table 7: 2.5" SATA SSD 3TG6-P MTBF

Product	Condition	MTBF (Hours)
Innodisk 2.5" SATA SSD 3TG6-P	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

2.5" SATA SSD 3TG6-P conforms to CE and FCC requirements.

2.6 RoHS Compliance

2.5" SATA SSD 3TG6-P is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value	
Read Cycles	Unlimited Read Cycles	
Flash endurance	3,000 P/E cycles	
Wear-Leveling Algorithm	Support	
Bad Blocks Management	Support	
Error Correct Code	Support	
TBW* (Total Bytes Written) Unit:TB		
Capacity	Sequential workload	Client workload
128GB	340.9	150
256GB	681.8	300
512GB	1364	600
1TB	2663	1172
2TB	5327	2344
4TB	10714	4800
*Note: 1. Sequential: Mainly sequential write, tested by Vdbench. 2. Client: Follow JESD218 Test method and JESD219A Workload, tested by ULINK. (The capacity lower than 64GB client workload is not specified in JEDEC219A, the values are estimated.) 3. Based on out-of-box performance.		

2.8 Transfer Mode

2.5" SATA SSD 3TG6-P support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

2.9 Pin Assignment


Innodisk 2.5" SATA SSD 3TG6-P uses a standard SATA pin-out. See Table 8 for 2.5" SATA SSD 3TG6-P pin assignment.

Table 8: Innodisk 2.5" SATA SSD 3TG6-P Pin Assignment


Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions


* DGS25-XXXM71EX1(A)QF

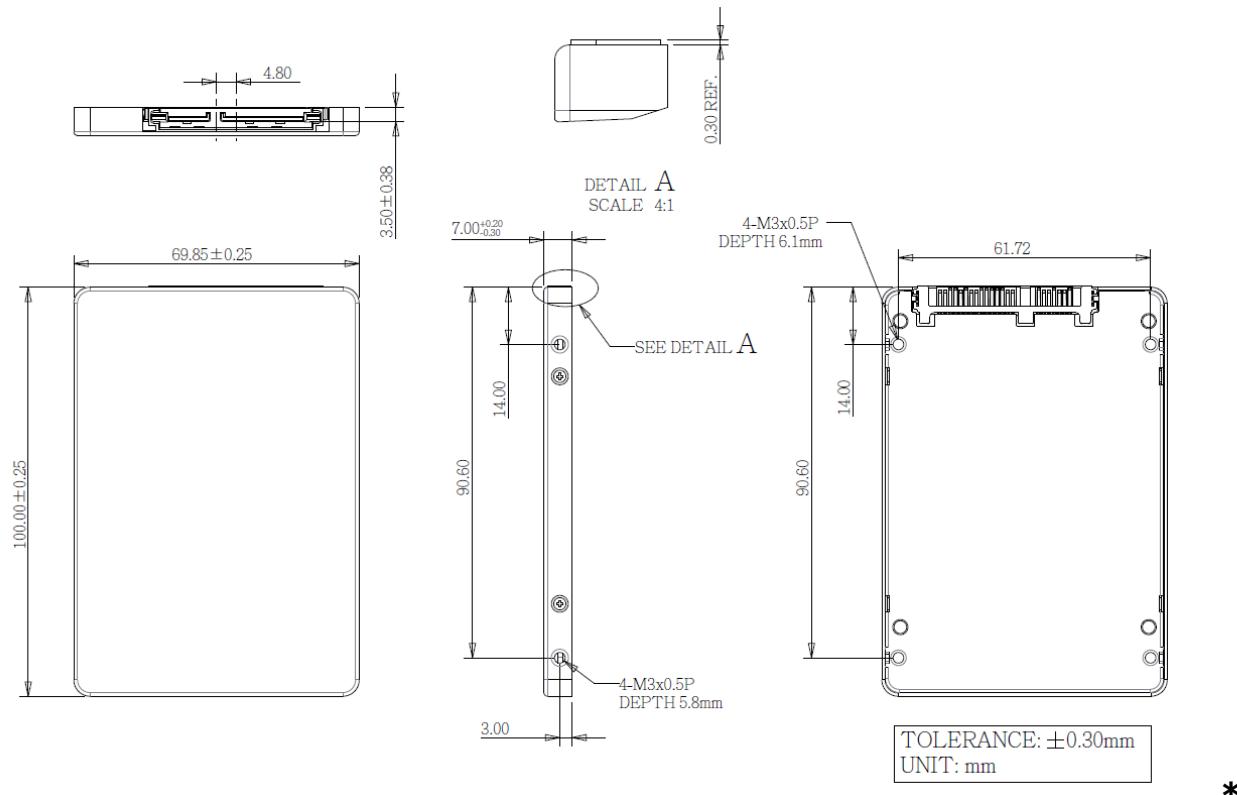

DGS25-XXXM71EX3QF

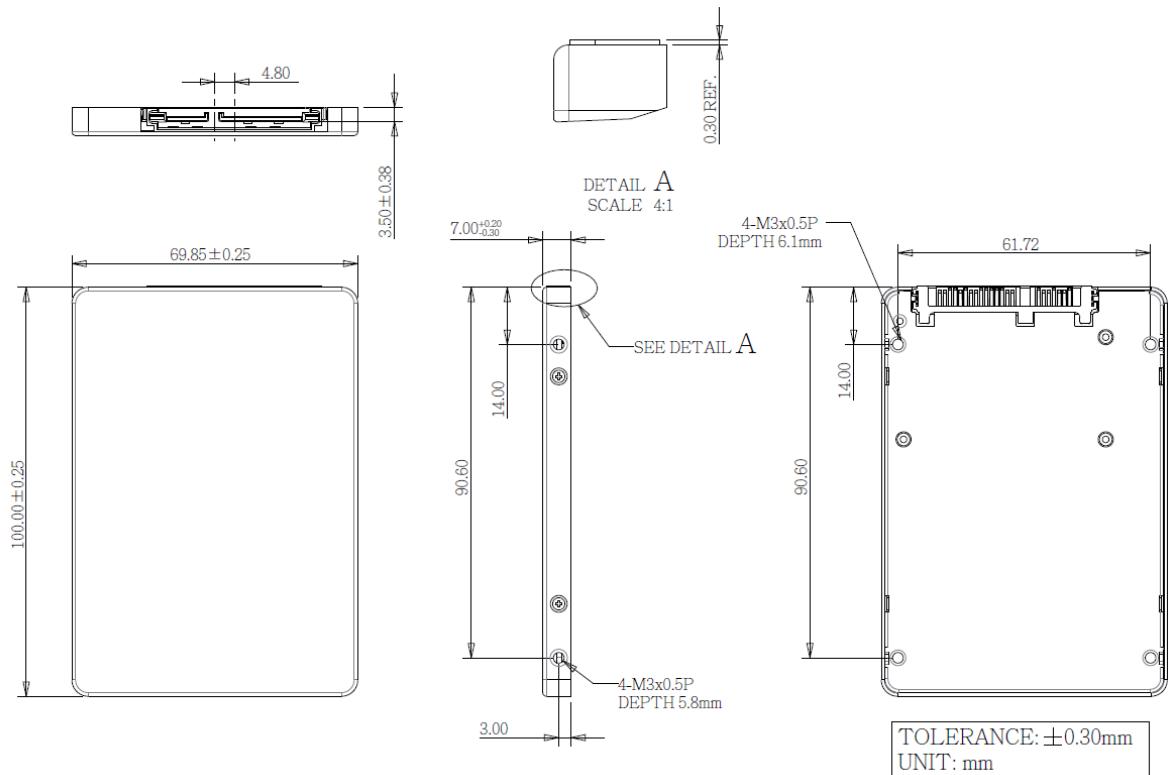

DGS25-04TM71EXAQF

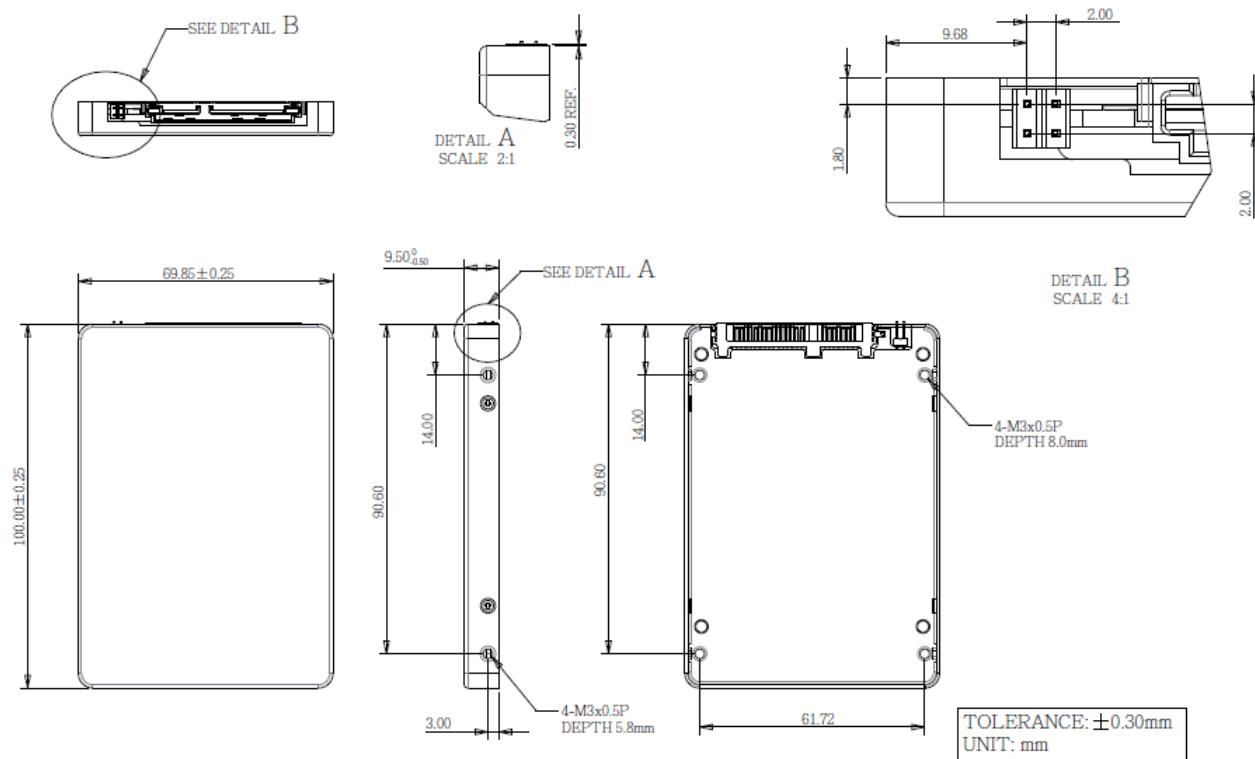

2.11 Assembly Weight

An Innodisk 2.5" SATA SSD 3TG6-P within 3D TLC flash ICs, 2TB's weight is 90 grams approx.

2.12 Seek Time

Innodisk 2.5" SATA SSD 3TG6-P is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk 2.5" SATA SSD 3TG6-P uses 3D TLC NAND flash memory, with 3,000 program & erase cycles, which is non-volatile, high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk 2.5" SATA SSD 3TG6-P from the system level, including the major hardware blocks.

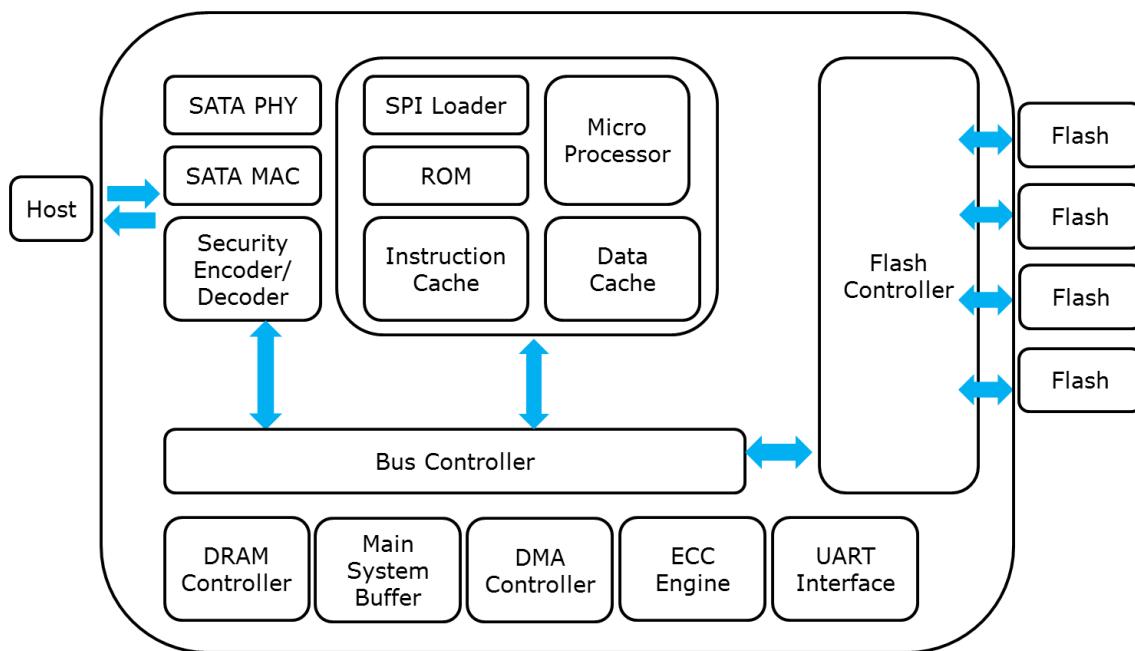


Figure 2: Innodisk 2.5" SATA SSD 3TG6-P Block Diagram

Innodisk 2.5" SATA SSD 3TG6-P integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

* iCell is optional feature with different part number.

3.2 SATA Controller

Innodisk 2.5" SATA SSD 3TG6-P is designed with 88SS1080, a SATA III 6.0Gbps controller. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 Error Detection and Correction

Innodisk 2.5" SATA SSD 3TG6-P is designed with hardware LDPC ECC engine with hard-decision and soft-decision decoding. Low-density parity-check (LDPC) codes have excellent error correcting performance close to the Shannon limit when decoded with the belief-propagation (BP) algorithm using soft-decision information.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 2.5" SATA SSD 3TG6-P uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 iData Guard

Innodisk's iData Guard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's iData Guard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection/TRIM

Garbage collection and TRIM technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.8 iCell Technology (Optional)

iCell circuit is designed with several capacitors to be able to provide power after host power off. The SSD controller can write all DRAM buffer data to flash, so that is why 2.5" SATA SSD 3TG6-P can ensure all data can be written to disk without any data loss.

3.9 iPower Guard

iPower Guard technology is a set of preventive measures that protect the SSD in an unstable power supply environment. This comprehensive package comprises safeguards for start-up and shut-down to maintain device performance and ensure data integrity.

3.10 Quick Erase

Quick Erase function is designed for emergency data erase in few seconds by providing ATA command.

3.10.1 Quick Erase Command

- Protocol: No Data

- Inputs

Table 9: Execute Quick Erase command for inputs information

Register	7	6	5	4	3	2	1	0
Features	21h							
Sector Count	41h							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	1	1	1	0	Na			
Command	82h							

- Normal Outputs

Table 10: Quick Erase command for normal output information

Register	7	6	5	4	3	2	1	0
Error	Na							
Sector Count	Na							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	obs	Na	obs	DEV	Na	Na	Na	Na
Status	BSY	DRDY	DF	Na	DRQ	Na	Na	ERR

Device register

DEV shall specify the selected device.

Status register

BSY will be cleared to zero indicating command completion

DRDY will be set to one.


DF (Device Fault) will be cleared to zero.

DRQ will be cleared to zero

ERR will be cleared to zero.

4. Installation Requirements

4.1 2.5" SATA SSD 3TG6-P Pin Directions

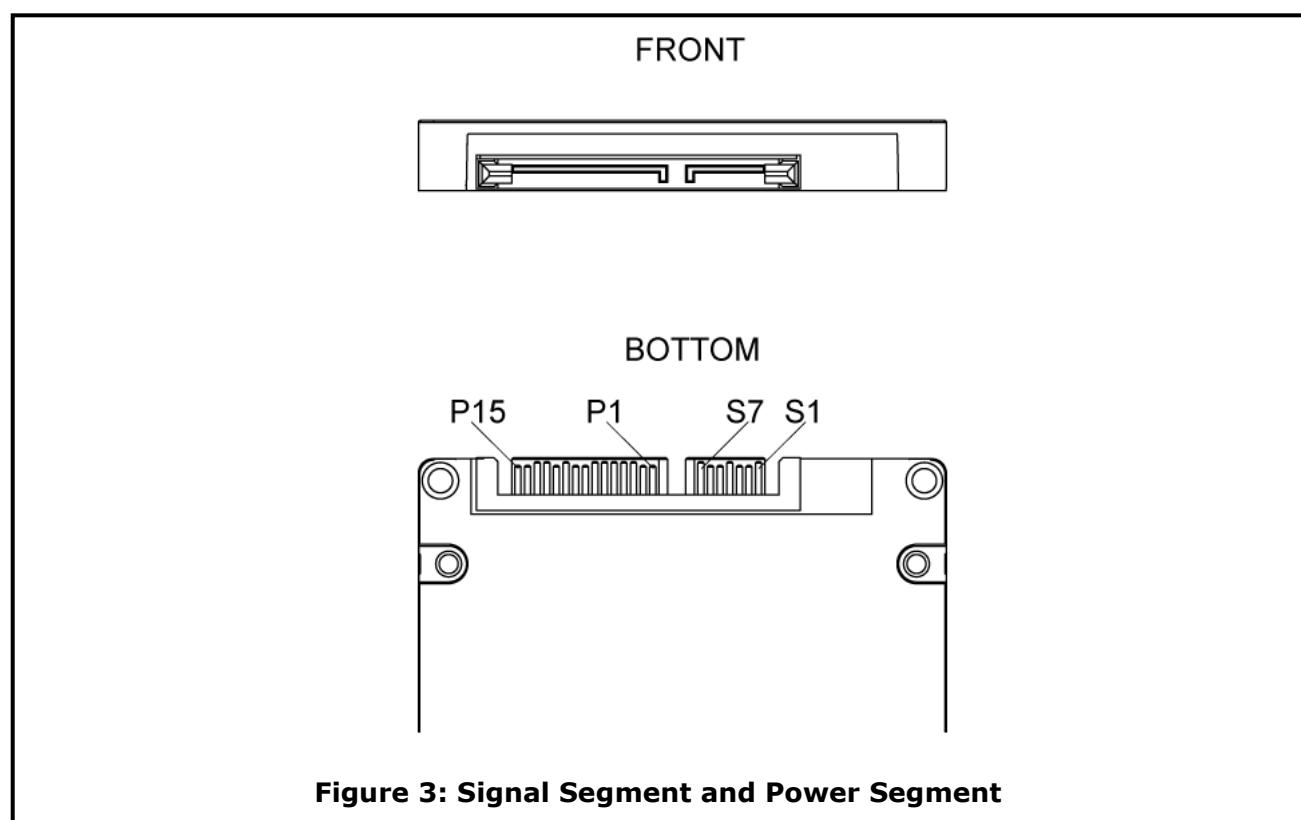

4.2 Electrical Connections for 2.5" SATA SSD 3TG6-P

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Form Factor

Please prepare following things:

- Screw driver.
- Four M3 screws. (Torque value is 3.0 Kgf.cm)
- SATA single cable (7-pin, Maximum length 1 meter).
- SATA power cable (15-pin).

Please turn off your computer, and open your computer's case. Find one of available 2.5-inch slot, and plug the SSD in. To use the screws fix the SSD. Plug in the SATA single cable, and power cable.

Please boot the installation Operation System from CD-ROM, and install Operation System into SSD.

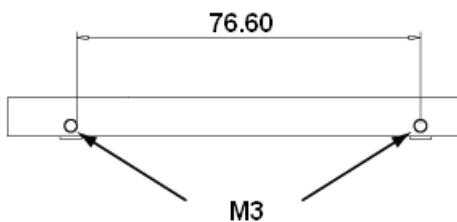


Figure 4: 2.5" SATA SSD 3TG6-P Mechanical Screw Hole

4.4 Device Drive

No additional device drives are required. Innodisk 2.5" SATA SSD 3TG6-P can be configured as a boot device.

5. SMART Feature Set

Innodisk 3TG6-P series support the SMART command set and defines some vendor-specific data to report SMART attributes of SSD.

Value	Command
D0h	Read Data
D1h	Read Attribute Threshold
D2h	Enable/Disable Autosave
D3h	Save Attribute Values
D4h	Execute OFF-LINE Immediate
D5h	Read Log
D6h	Return Status
D8h	Enable SMART Operations
D9h	Disable SMART Operations
DAh	Return Status

5.1 SMART Attributes

Innodisk 3TG6-P series SMART data attributes are listed in following table.

Attribute ID (hex)	Raw Attribute Value							Attribute Name
1 (01h)	MSB	00	00	00	00	00	00	Raw Read Error Rate
5 (05h)	LSB	MSB	00	00	00	00	00	Reallocated Sector Count
9 (09h)	LSB			MSB	00	00	00	Power-on Hours
12 (0Ch)	LSB			MSB	00	00	00	Power Cycle Count
160 (A0h)	LSB			MSB	00	00	00	Uncorrectable sector count when read/write
161 (A1h)	LSB	MSB	00	00	00	00	00	Number of valid spare block
163 (A3h)	LSB	MSB	00	00	00	00	00	Number of initial invalid block
164 (A4h)	LSB	MSB	00	00	00	00	00	Total erase count
165 (A5h)	LSB			MSB	00	00	00	Maximum erase count
166 (A6h)	LSB			MSB	00	00	00	Minimum erase count
167 (A7h)	LSB			MSB	00	00	00	Average erase count
168 (A8h)	LSB			MSB	00	00	00	Max erase count of spec
169 (A9h)	LSB			MSB	00	00	00	Remain Life (percentage)
175 (AFh)	LSB			MSB	00	00	00	Program fail count in worst die
176 (B0h)	LSB			MSB	00	00	00	Erase fail count in worst die
177 (B1h)	LSB			MSB	00	00	00	Total wear level count

178 (B2h)	LSB	MSB	00	00	00	00	Runtime invalid block count
181 (B5h)	LSB			MSB	00	00	Total program fail count
182 (B6h)	LSB	MSB	00	00	00	00	Total erase fail count
187 (BBh)	LSB			MSB	00	00	Uncorrectable error count
192 (C0h)	LSB	MSB	00	00	00	00	Power-Off Retract Count
194 (C2h)	MSB	00	00	00	00	00	Controlled temperature
195 (C3h)	LSB			MSB	00	00	Hardware ECC recovered
196 (C4h)	LSB			MSB	00	00	Reallocation event count
198 (C6h)	LSB			MSB	00	00	Uncorrectable error count off-line
199 (C7h)	LSB	MSB	00	00	00	00	UltraDMA CRC error count
225 (E1h)	LSB					MSB	Total LBAs written (each write unit = 32MB)
232 (E8h)	LSB	MSB	00	00	00	00	Available reserved space
241 (F1h)	LSB					MSB	Total LBAs written (each write unit = 32MB)
242 (F2h)	LSB					MSB	Total LBAs read (each write unit = 32MB)

6. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	D	G	S	2	5	-	3	2	G	M	7	1	E	C	1	Q	F	(P)	-	X	X
Description	Disk	2.5" SATA SSD					Capacity	Category	Flash mode	Operation Temp.	Internal Control	CH.	Flash	icell			Customized Code				

Definition

Code 1st (Disk)		Code 13th (Flash mode)
D : Disk		E: 64 layers 3D TLC
Code 2nd ~ 5th (Form Factor)		Code 14th (Operation Temperature)
GS25: 2.5" SATA SSD		C: Standard Grade (0°C~ +70°C)
Code 7th ~9th (Capacity)		W: Industrial Grade (-40°C~ +85°C)
A28: 128GB		Code 15th (Internal control)
B56: 256GB		PCB version
C12:512GB		
01T: 1TB		
02T: 2TB		
04T: 4TB		Code 16th (Channel of data transfer)
Code 10th ~12th (Series)		Q: Quad Channels
M71: 2.5" SATA SSD 3TG6-P		
		Code 17th (Flash Type)
		F: Toshiba 3D TLC
		Code 18th (iCell)
		P: Optional
		Code 20th ~21th (Customized code)

Appendix

innodisk

宜鼎國際股份有限公司
Innodisk Corporation

Page 1/1

Tel:(02)7703-3000 Fax:(02)7703-3555 Internet: <http://www.innodisk.com/>

RoHS 自我宣告書(RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予新漢股份有限公司之所有產品，皆符合歐盟 2011/65/EU 對於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to Nexcom are complied with European Union RoHS Directive (2011/65/EU) requirement.

二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm

立 保 證 人 (Guarantor)

Company name 公司名稱： Innodisk Corporation 宜鼎國際股份有限公司



Company Representative 公司代表人： Randy Chien 陳川勝



Company Representative Title 公司代表人職稱： Chairman 董事長

Date 日期： 2016 / 08 / 04

宜鼎國際股份有限公司
Innodisk Corporation

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

REACH Declaration of Conformity

Manufacturer Product: All Innodisk EM Flash and Dram products

1. 宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration , Evaluation and Authorization of Chemicals : REACH)之規定 (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 20/06/2016)。所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2)包裝材料；(3)設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the REACH Regulation

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 20/06/2016).

Products include : 1) Product and raw material used by the product : 2) Packaging material : 3) Raw material used in the process of design, production and rework

2. 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

立 保 證 書 人 (Guarantor)

Company name 公司名稱 : InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人 : Randy Chien 簡川勝

Company Representative Title 公司代表人職稱 : Chairman 董事長

Date 日期 : 2016 / 06 / 23

