


PORT SIDE




ALIGN THIS EDGE WITH THE FACE OF RIB2

HMS VICTORY GUN AND ENTRY PORT POSITION PLANS

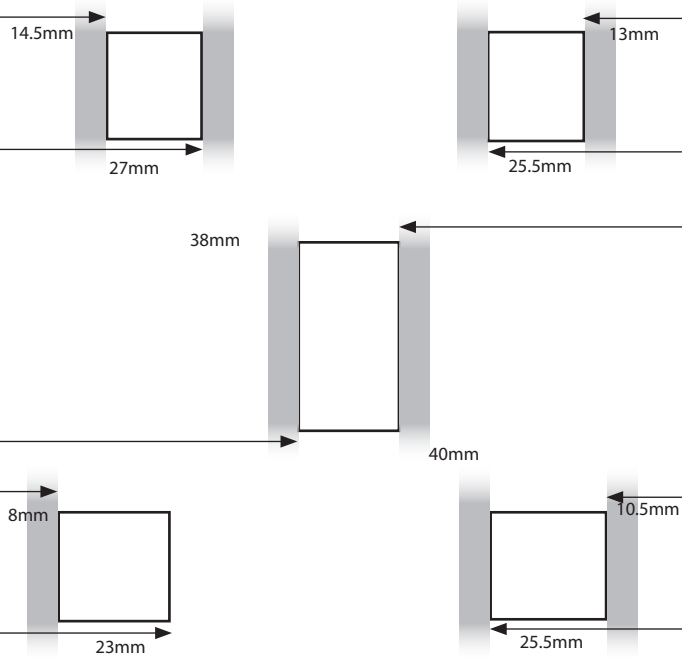

ALIGN THIS EDGE WITH THE FACE OF THE KEEL

STARBOARD SIDE

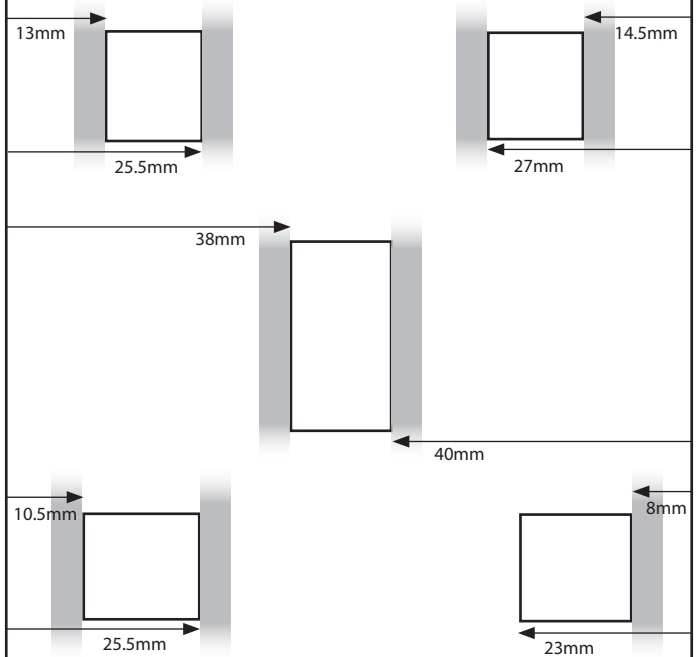

ALIGN THIS EDGE WITH THE FACE OF RIB2

Use these plans to work out where to make the openings for the ports in the cross-sectional model of HMS Victory.

As shown in the instructions, cut both these plans out of the sheet and fasten them to the sides of the assembled hull, over the planking. Align the bottom edge with the joint between the keel and the planking, and align the long edges with the sides of the cross-section. Make sure that the paper is flush with the planking. You can then use a sharp point to press through each corner as a guide to the position of the opening.

Dimensions are from the closest edge of the model and the grey shaded lines show the positions of the strengthening braces inside the hull. As explained in the steps, double-check the positions of the openings before cutting holes in the planking.

ALIGN THIS EDGE WITH THE FACE OF THE KEEL