





QTY.	PART NUMBER
1	MUNCASTER4.1-1-01-BED PLATE
2	MUNCASTER4.1-1-02-BEARING BLOCK
1	MUNCASTER4.1-1-03-CROSSHEAD SLIDE
1	MUNCASTER4.1-1-04-VALVE SPINDLE GUIDE BLOCK
1	MUNCASTER4.1-1-05-CYLINDER
1	MUNCASTER4.1-1-06-CYLINDER FRONT COVER
1	MUNCASTER4.1-1-07-CYLINDER REAR COVER
1	MUNCASTER4.1-1-08-SLIDE VAVLE PORT PLATE
1	MUNCASTER4.1-1-09-VALVE CHEST
1	MUNCASTER4.1-1-10-VALVE CHEST COVER
1	MUNCASTER4.1-1-11-WALL BASE
1	MUNCASTER4.1-1-12-NAME PLATE
1	MUNCASTER4.1-2-01-CRANKSHAFT
1	MUNCASTER4.1-2-02-FLYWHEEL
1	MUNCASTER4.1-2-03-ECCENTRIC SHEAVE
1	MUNCASTER4.1-2-04-PISTON+CROSSHEAD
1	MUNCASTER4.1-2-05-CON-ROD
1	MUNCASTER4.1-2-06-ECCENTRIC STRAP
1	MUNCASTER4.1-2-07-SLIDE VALVE+SPINDLE
1	MUNCASTER4.1-M2.5 NUT
1	MUNCASTER4.1-M2.5 WASHER
2	MUNCASTER4.1-M3 NUT
2	MUNCASTER4.1-M3x6 GRUB SREW
2	MUNCASTER4.1-M3x10 C-SINK SCREW
9	MUNCASTER4.1-M3x10 HEX BOLT
2	MUNCASTER4.1-M3x18 HEX BOLT
3	MUNCASTER4.1-M4 NUT
1	MUNCASTER4.1-M4 WASHER
2	MUNCASTER4.1-M4x8 HEX BOLT
16	MUNCASTER4.1-M4x10 HEX BOLT
4	MUNCASTER4.1-M4x14 HEX BOLT
4	MUNCASTER4.1-M4x16 HEX BOLT
8	MUNCASTER4.1-M4x24 HEX BOLT
2	MUNCASTER4.1-M4x28 HEX BOLT
8	MUNCASTER4.1-M5 NUT
8	MUNCASTER4.1-M5x28 HEX BOLT

MATERIAL ABBREVIATIONS:

ALU = ALUMINIUM/HARD ALUMINIUM
BRS = BRASS
BRZ = BRONZE OR GUNMETAL (BRZ/GM)
CI = CAST IRON
CU = COPPER
GRA = GRAPHITE
MS = MILD STEEL/BRIGHT MILD STEEL
S/S = SILVER STEEL OR STAINLESS STEEL
SPS = SPRING STEEL
PEEK= POLYETHER ETHER KETONE
SYN = SYNTHETIC MATERIAL SUCH AS VETON,
NYLON, TEFLON OR RUBBER
IN GENERAL SYNTHETIC MATERIALS SOULD
BE ABLE TO WITHSTAND THE HEAT AND
PRESSURE(S) APPLIED TO THEM.
nnn/nnn MEANS THAT EITHER MATERIAL CAN BE
USED

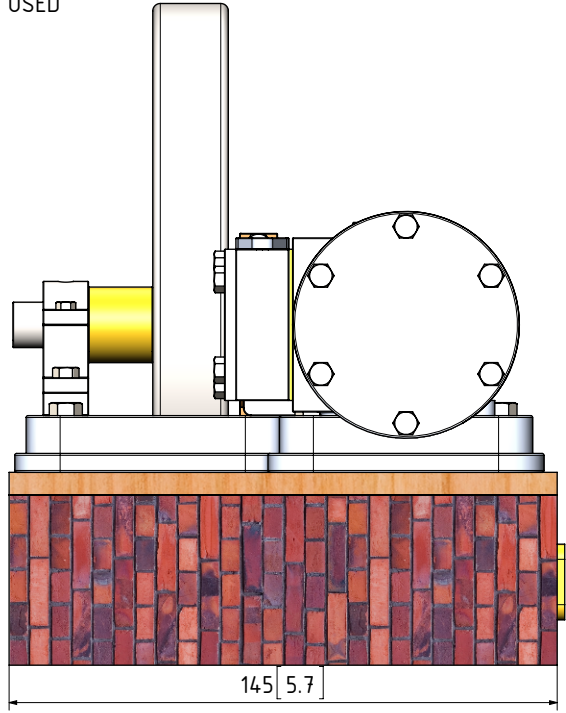


NOTES:
0. ALL DRAWINGS ARE IN METRIC MEASUREMENTS
1. ALL ENGINEERING PRACTICES SHALL BE APPLIED WITH REGARDS TO HOLE AND SHAFT TOLERANCES.
2. WHERE SCREWS OR BOLTS ARE USED THE CLEARANCE HOLES SHALL BE APPROXIMATELY 5% TO 8% LARGER THAN THE MATCHING TAPPED HOLE.
3. PREFERABLY ALL TAPPED HOLES AND MATCHING SCREWS AND/OR BOLTS TO BE METRIC FINE (MF)
4. MATERIALS SPECIFIED ON THE DRAWINGS ARE INDICATIVE ONLY. THE BUILDER CAN MAKE HIS/HER OWN MATERIAL CHOICE.
5. ALL CONNECTIONS/JOINTS WHICH HAVE STEAM PRESSURE APPLIED TO IT SHALL BE SILVER/HARD SOLDERED.
6. COMPRESSION SPRINGS ARE DRAWN IN COMPRESSED STATE (CP), UNCOMPRESSED STATE IS APPROX 40% TO 60% LONGER THEN COMPRESSED STATE.
7. WHERE PREFERRED SCREW OR RIVETED CONNECTIONS CAN BE OMITTED AND PARTS CAN BE BONDED TOGETHER BY USING EITHER HIGH STRENGTH GLUE, EPOXY RESIN, OR SOLDER.
8. PARTS WHICH ARE DIRECTLY EXPOSED TO STEAM AND/OR WATER SHOULD BE CONSTRUCTED USING NON-FERROUS OR NON CORROSIVE MATERIAL SUCH AS BRASS, BRONZE, GUNMETAL, STAINLESS STEEL, COPPER OR MONEL.
9. THE ORDER IN WHICH THE PARTS/COMPONENTS ARE MANUFACTURED AND THE MODEL IS ASSEMBLED IS ENTIRELY LEFT TO THE BUILDER/MODEL MAKER.
10. A COLOUR SCHEME FOR THIS PROJECT IS ENTIRELY LEFT UP TO THE MODEL MAKER.
11. THE MANNER IN WHICH THE PARTS/COMPONENTS ARE MANUFACTURED IS ENTIRELY LEFT UP TO THE BUILDER.
12. USE LOCITITE, ON SCREW OR PRESS FIT CONNECTIONS OR SURFACES, WERE DEEMED NECESSARY TO PREVENT PARTS FROM LOOSENING.
13. WASHER SHALL BE USED WHERE DEEMED NECESSARY.
XX. ERRORS AND/OR OMISSIONS MAY OCCUR IN THE DRAWINGS, DO NOT HESITATE TO CONTACT ME SO THAT THE ERRORS/OMISSIONS CAN BE RECTIFIED.

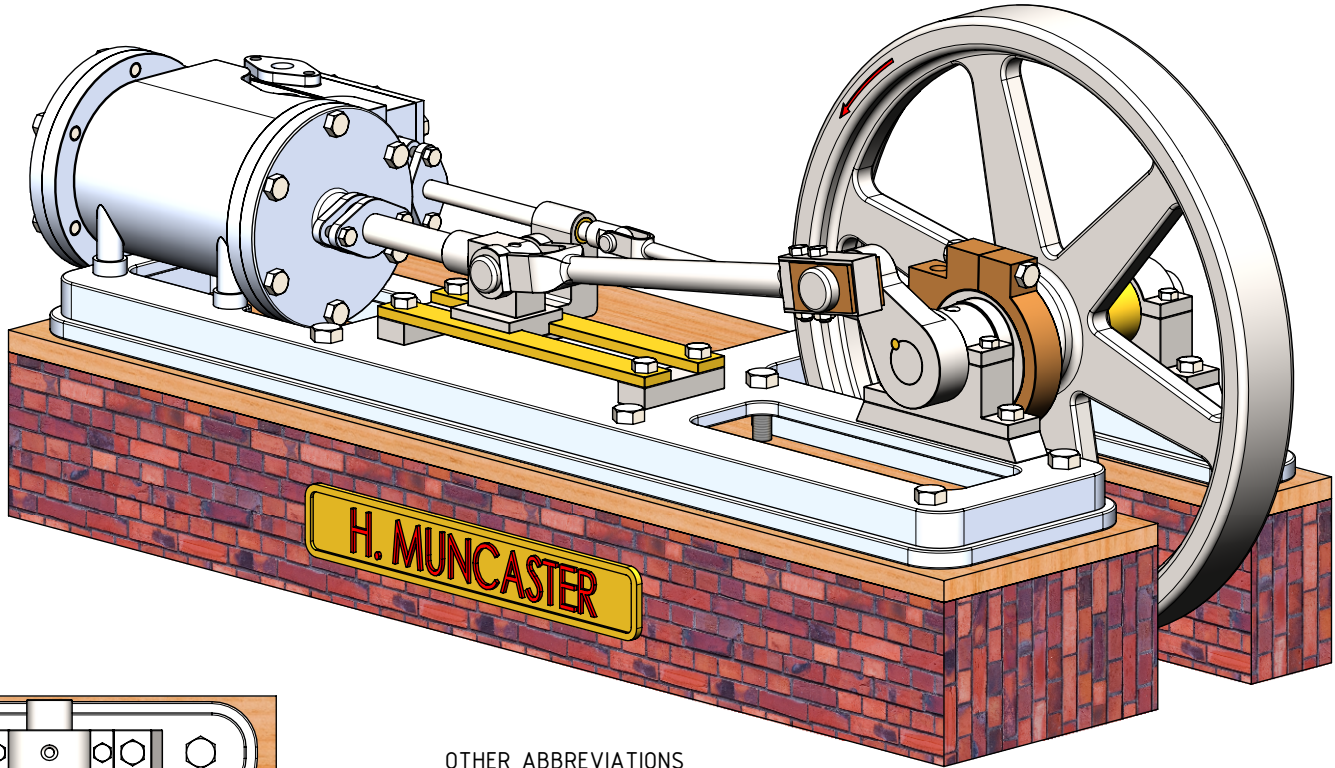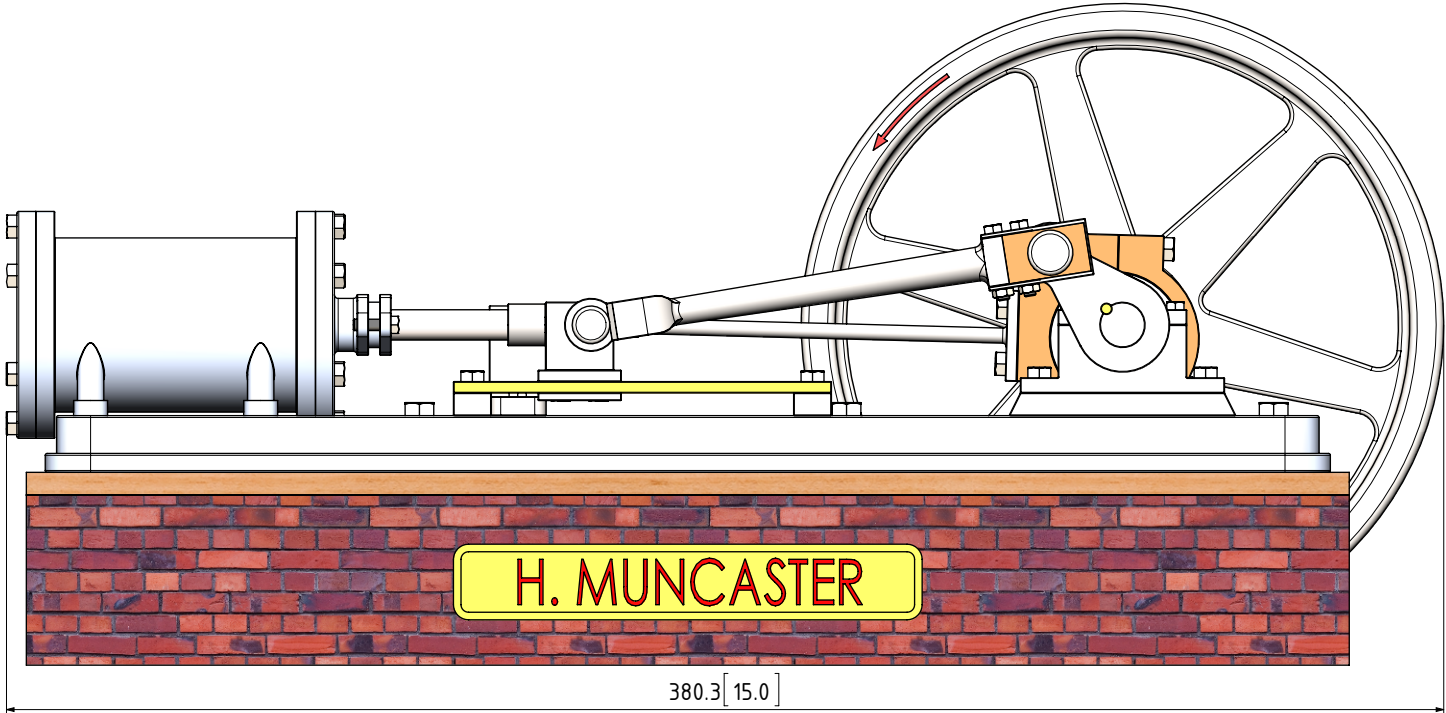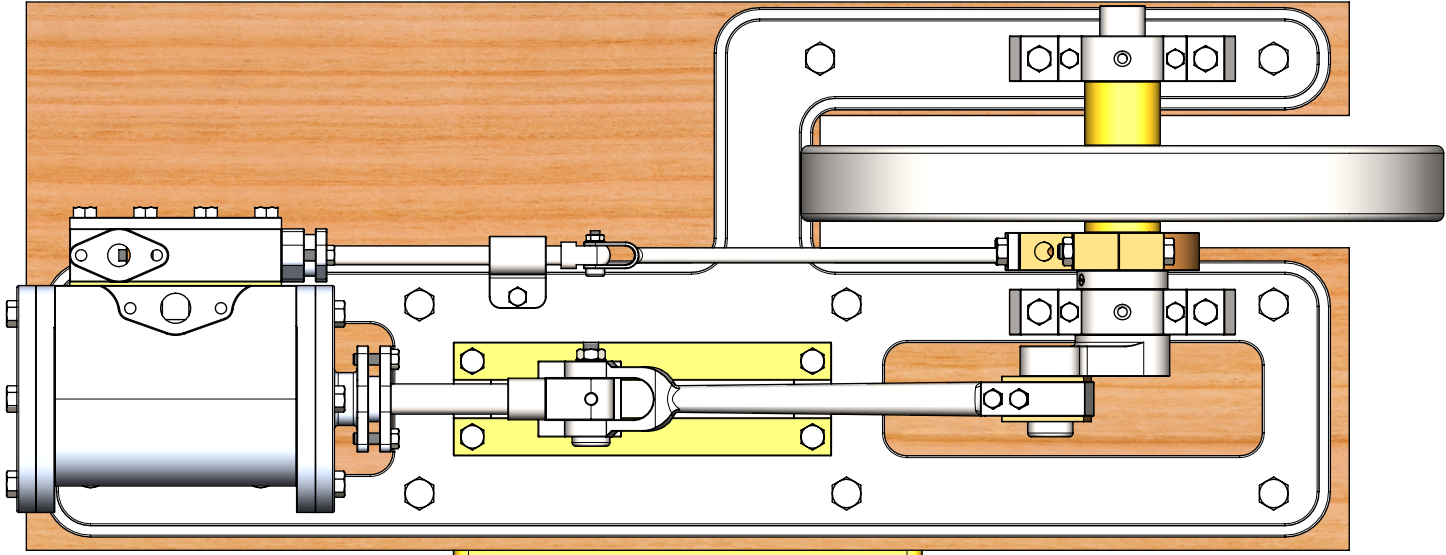


OTHER ABBREVIATIONS

DP = DEEP
DAA= DRILL AFTER ASSEMBLY
D&TAA= DRILL AND TAP AFTER ASSEMBLY
CF = CLOSE FIT (SIZE FOR SIZE)
PF = PRESS FIT
PFAA= PRESS FIT AFTER ASSEMBLY
PCD = PITCH CIRCLE DIAMETER
RM = REAM
HEX = HEXACON, 6SIDED
CP = COMPRESSED
KNL = KNURLED
CSK = COUNTERSINK
PL = PLACES
DWL= DOWEL
(T)HESOP=(TAPPED)HOLES EQUALLY SPACED ON PCD
(T)HESOC=(TAPPED)HOLES EQUALLY SPACED ON CIRCUMFERENCE
[SA-xxx]= SUB ASSEMBLY-xxx



THE OFF SET ANGLE OF THE ECCENTRIC IN RELATION TO THE CRANK AXIS TO BE EXPERIMENTALLY DETERMINED FOR THE SMOOTH RUNNING OF THE ENGINE AND SATISFACTION OF THE BUILDER

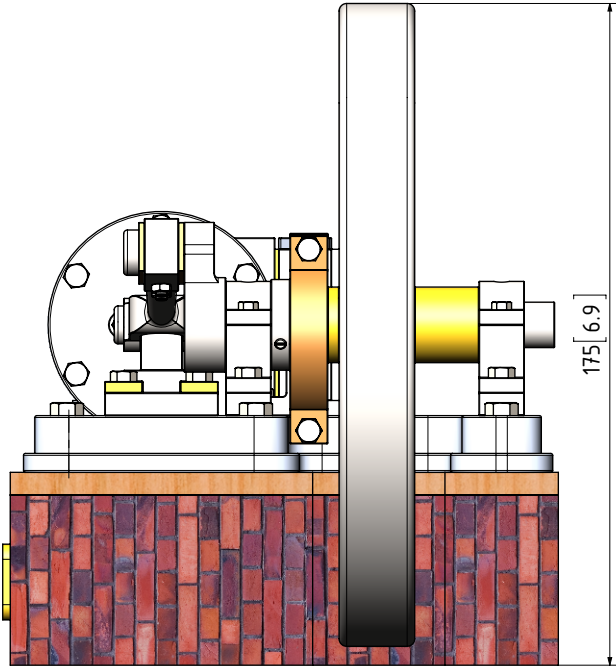

NOTES: THE ORIGINAL DRAWINGS WERE PUBLISHED IN THE "MODEL ENGINEER" MAGAZINE OF FEBTUARY 1957 UNDER THE HEADING OF "THE MUNCASTER STEAM-ENGINE MODELS".

TITLE
1 CYL HORIZONTAL MILL STEAM ENGINE WITH
BAR CROSSHEAD SLIDES BY H.MUNCASTER.

DRAWING CONTENTS
GENERALARRANGEMENT, B.O.M.,
NOTES, ISOMETRIC VIEW

PROJECT No 11-04-01
JDW DRAUGHTING SERVICES
J.A.M. DE WAAL, 12 BRIGHTWELL STREET PAPA KURA 2110.
NEW ZEALAND. PHONE: 0064 09 2988815. MOB: 0211791000
E-MAIL: dewaal@xfra.co.nz.

PROJECTION
DATE
APRIL-2017
SHEET: 01 OF 03

MODEL SCALE: 1:1
DWG SCALE: 1:1 @A3 OR AS SHOWN
Copyright © J.A.M. DE WAAL PAPA KURA NZ
A3 No:MUNCASTER4.1-01