



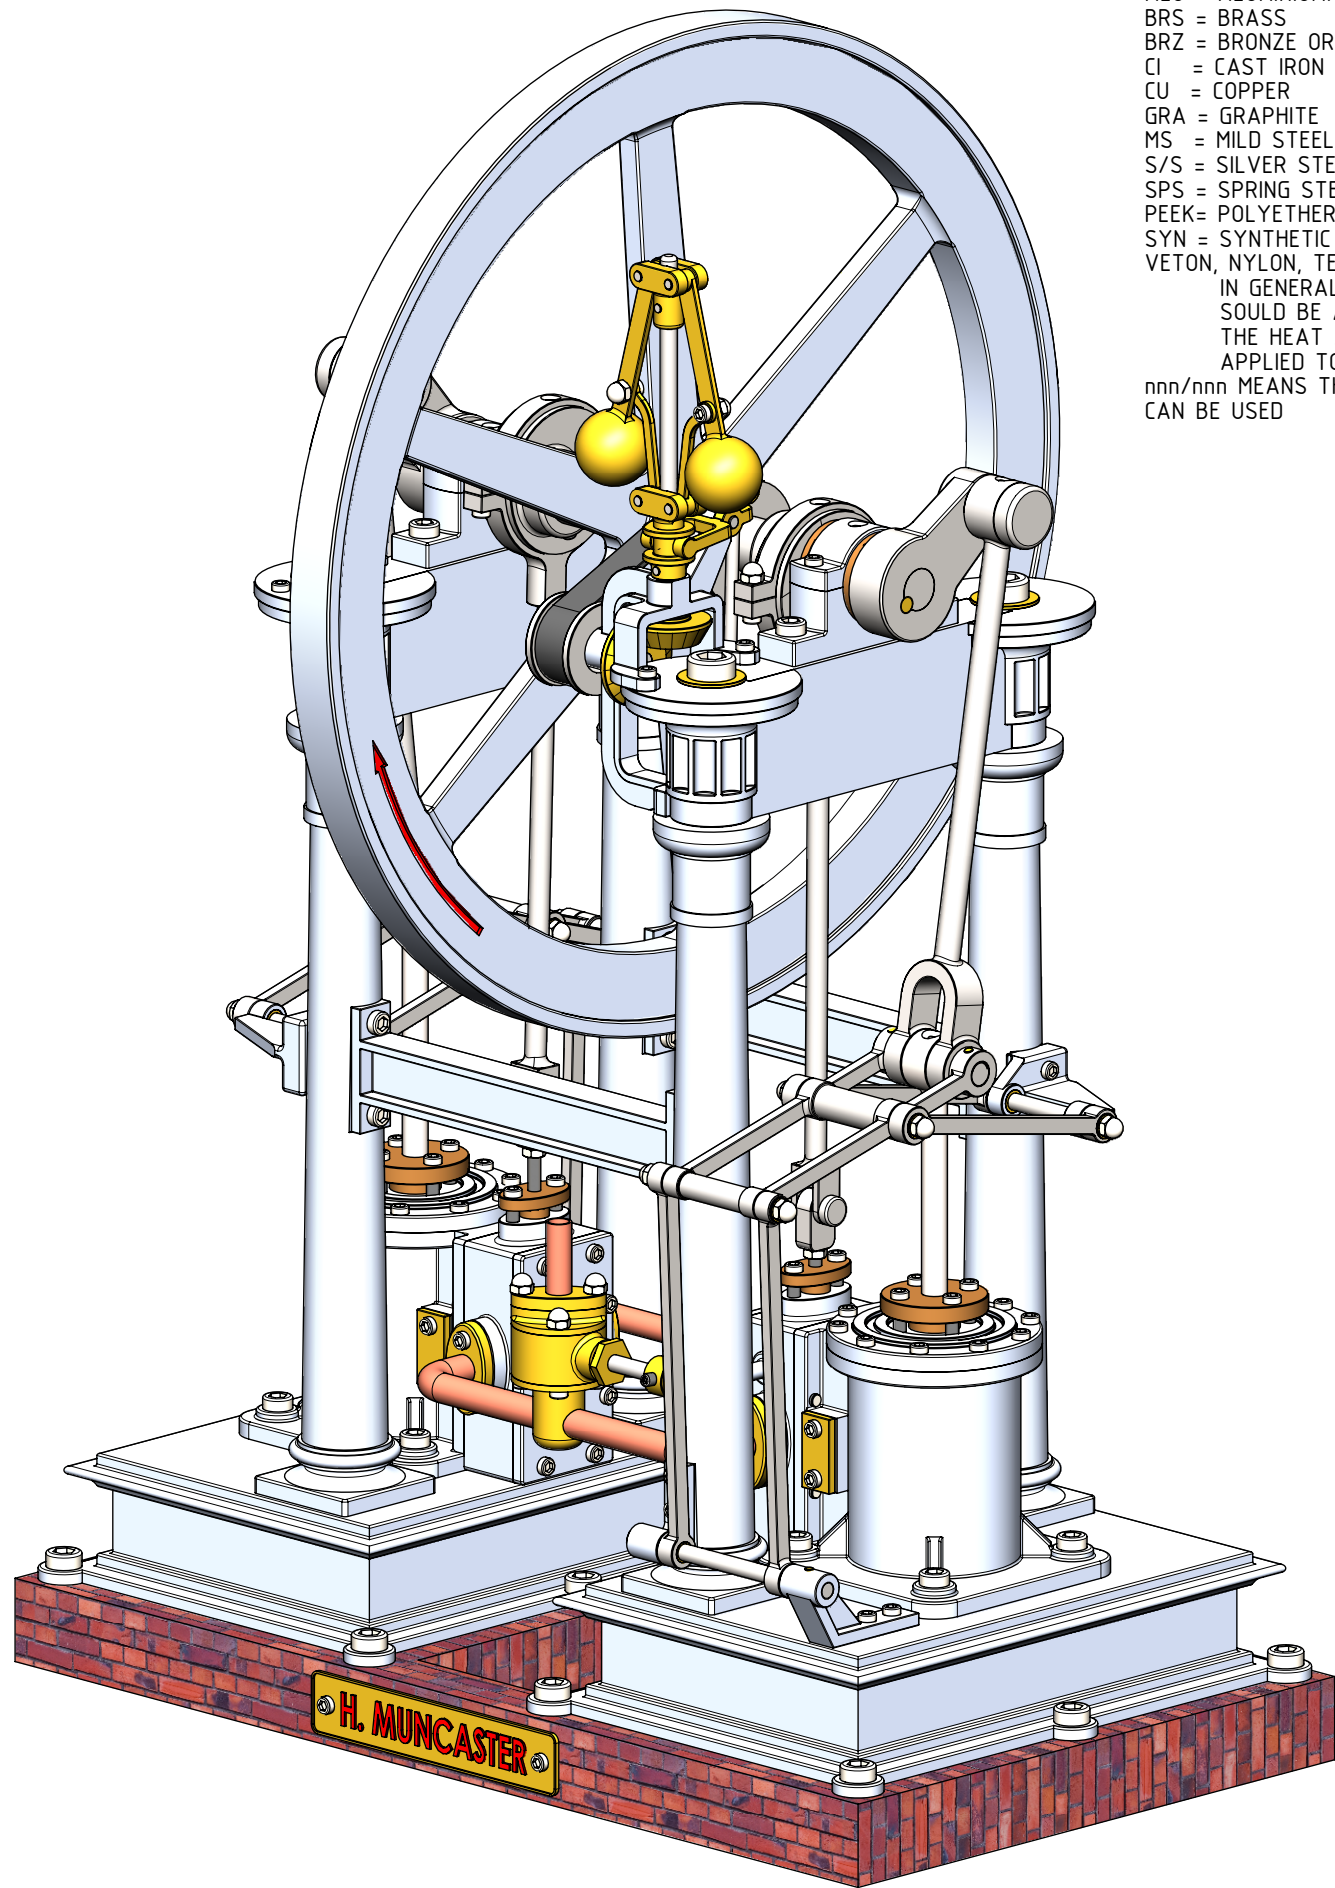

MATERIAL ABBREVIATIONS:
ALU = ALUMINIUM/HARD ALUMINIUM
BRS = BRASS
BRZ = BRONZE OR GUNMETAL (BRZ/GM)
CI = CAST IRON
CU = COPPER
GRA = GRAPHITE
MS = MILD STEEL/BRIGHT MILD STEEL
S/S = SILVER STEEL OR STAINLESS STEEL
SPS = SPRING STEEL
PEEK= POLYETHER ETHER KETONE
SYN = SYNTHETIC MATERIAL SUCH AS
VETON, NYLON, TEFLON OR RUBBER
IN GENERAL SYNTHETIC MATERIALS
SOULD BE ABLE TO WITHSTAND
THE HEAT AND PRESSURE(S)
APPLIED TO THEM.
nnn/nnn MEANS THAT EITHER MATERIAL
CAN BE USED

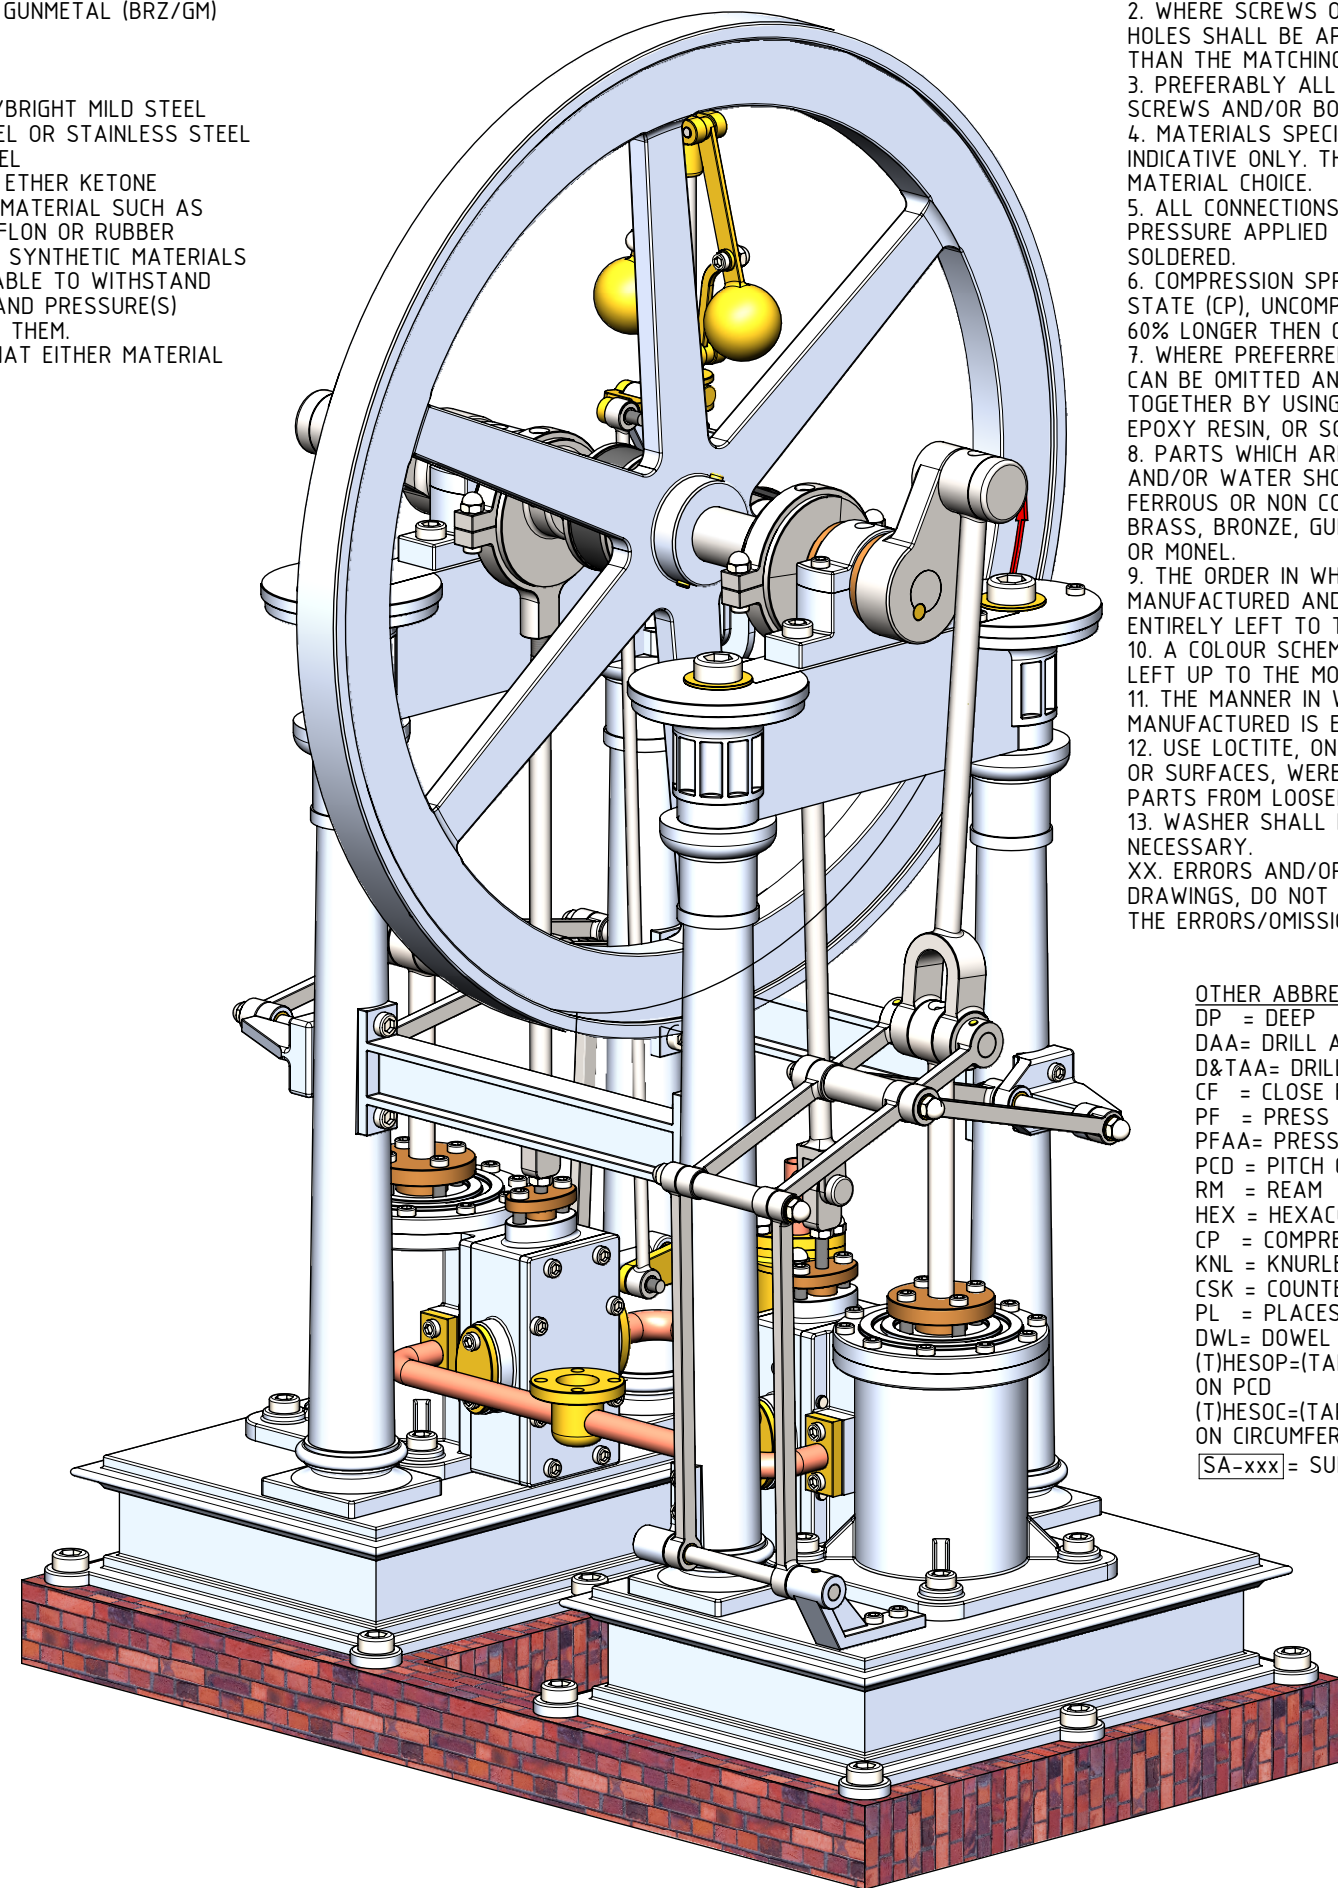

NOTES:
0. ALL DRAWINGS ARE IN METRIC MEASUREMENTS
1. ALL ENGINEERING PRACTICES SHALL BE APPLIED WITH
REGARDS TO HOLE AND SHAFT TOLERANCES.
2. WHERE SCREWS OR BOLTS ARE USED THE CLEARANCE
HOLES SHALL BE APPROXIMATELY 5% TO 8% LARGER
THAN THE MATCHING TAPPED HOLE.
3. PREFERABLY ALL TAPPED HOLES AND MATCHING
SCREWS AND/OR BOLTS TO BE METRIC FINE (MF)
4. MATERIALS SPECIFIED ON THE DRAWINGS ARE
INDICATIVE ONLY. THE BUILDER CAN MAKE HIS/HER OWN
MATERIAL CHOICE.
5. ALL CONNECTIONS/JOINTS WHICH HAVE STEAM
PRESSURE APPLIED TO IT SHALL BE SILVER/HARD
SOLDERED.
6. COMPRESSION SPRINGS ARE DRAWN IN COMPRESSED
STATE (CP), UNCOMPRESSED STATE IS APPROX 40% TO
60% LONGER THEN COMPRESSED STATE.
7. WHERE PREFERRED SCREW OR RIVETED CONNECTIONS
CAN BE OMITTED AND PARTS CAN BE BONDED
TOGETHER BY USING EITHER HIGH STRENGTH GLUE,
EPOXY RESIN, OR SOLDER.
8. PARTS WHICH ARE DIRECTLY EXPOSED TO STEAM
AND/OR WATER SHOULD BE CONSTRUCTED USING NON-
FERROUS OR NON CORROSIVE MATERIAL SUCH AS
BRASS, BRONZE, GUNMETAL, STAINLESS STEEL, COPPER
OR MONEL.
9. THE ORDER IN WHICH THE PARTS/COMPONENTS ARE
MANUFACTURED AND THE MODEL IS ASSEMBLED IS
ENTIRELY LEFT TO THE BUILDER/MODEL MAKER.
10. A COLOUR SCHEME FOR THIS PROJECT IS ENTIRELY
LEFT UP TO THE MODEL MAKER.
11. THE MANNER IN WHICH THE PARTS/COMPONENTS ARE
MANUFACTURED IS ENTIRELY LEFT UP TO THE BUILDER.
12. USE LOCTITE, ON SCREW OR PRESS FIT CONNECTIONS
OR SURFACES, WERE DEEMED NECESSARY TO PREVENT
PARTS FROM LOOSENING.
13. WASHER SHALL BE USED WHERE DEEMED
NECESSARY.
XX. ERRORS AND/OR OMISSIONS MAY OCCUR IN THE
DRAWINGS, DO NOT HESITATE TO CONTACT ME SO THAT
THE ERRORS/OMISSIONS CAN BE RECTIFIED.

OTHER ABBREVIATIONS
DP = DEEP
DAA= DRILL AFTER ASSEMBLY
D&TAA= DRILL AND TAP AFTER ASSEMBLY
CF = CLOSE FIT (SIZE FOR SIZE)
PF = PRESS FIT
PFAA= PRESS FIT AFTER ASSEMBLY
PCD = PITCH CIRCLE DIAMETER
RM = REAM
HEX = HEXACON, 6SIDED
CP = COMPRESSED
KNL = KNURLED
CSK = COUNTERSINK
PL = PLACES
DWL= DOWEL
(T)HESOP=(TAPPED)HOLES EQUALLY SPACED
ON PCD
(T)HESOC=(TAPPED)HOLES EQUALLY SPACED
ON CIRCUMFERENCE
[SA-xxx]= SUB ASSEMBLY-xxx

NOTES: THE ORIGINAL DRAWINGS WERE PUBLISHED IN THE "MODEL ENGINEER" MAGAZINE OF FEBTUARY 1957 UNDER THE HEADING OF "THE MUNCASTER STEAM-ENGINE MODELS".

TITLE
2 CYL. ANTABLATURE STEAM ENGINE WITH
PARALLEL MOTION CROSSHEAD BY H.MUNCASTER.

DRAWING CONTENTS
NOTES AND ISOMETRIC VIEWS

PROJECT No 11-07-02
JDW DRAUGHTING SERVICES
J.A.M. DE WAAL, 12 BRIGHTWELL STREET PAKAPURA 2110.
NEW ZEALAND. PHONE: 0064 09 2988815. MOB: 0211791000
E-MAIL: dewaal@xtra.co.nz.

PROJECTION
DATE JULY-2017
SHEET: 02 OF 06
MODEL SCALE: 1:1
DWG SCALE: 1:1 @A3 OR AS SHOWN
Copyright © J.A.M. DE WAAL PAKAPURA NZ
A3 No:MUNCASTER7.2-02