



# SONANCE GARDEN SERIES

8 SGS SATELLITES | 8 GROUND STAKES | 1 SGS SUBWOOFER | 1 2-125 AMPLIFIER



**SGS System**

## SGS SYSTEM FEATURES

### AESTHETICS

Pivoting mounting knuckle for precise audio direction

Wide dispersion, removable grille

Non-corrosive, high-heat ABS sealed enclosure

### PERFORMANCE

8 Ohms impedance matched system

Dual voice coil subwoofer

Perfectly even coverage for comfortable listening in areas up to 3,500 square feet  
(depending on property layout)

### INSTALLATION

1/2" NPS threading

Compatible with Sonance 19" stake, tree mount, and surface mount accessories

Complete 8.1 System configuration on a single two-channel amplifier


Expandable for up to 16.2 configuration

# SONANCE GARDEN SERIES

## Dimensions


### SGS SAT

Speaker Diameter:	4.52" (114.8mm)
Height:	16.47" (418.28mm)
Depth:	6.73" (171mm)

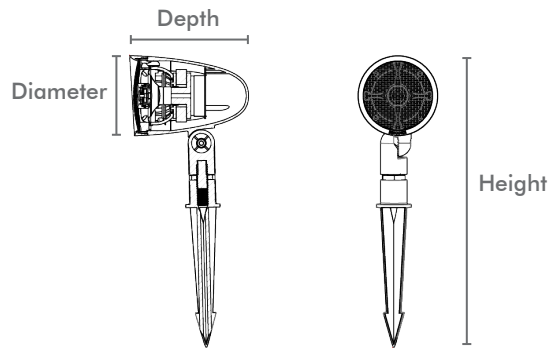

### SGS SUB

Canopy Width:	14.96" (380mm)
Enclosure Width:	12.2" (310mm)
Canopy Height:	7.43" (188.75mm)
Enclosure Height:	17.4" (442mm)
Overall Height:	24.83" (630.75mm)

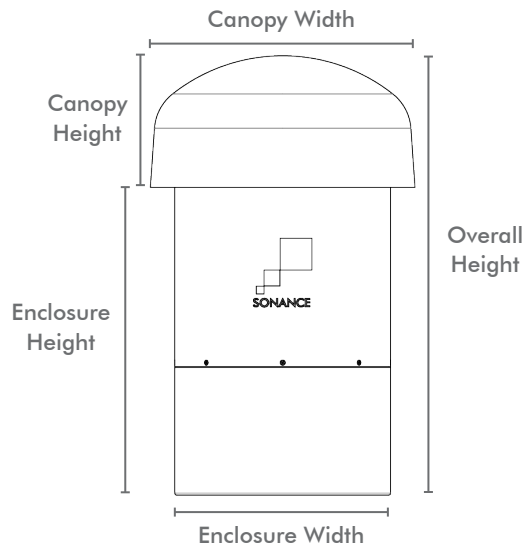

## Specifications

	SGS Satellite Speaker	SGS Subwoofer
<b>Tweeter:</b>	3/4" (19mm) Polyurethane dome	-
<b>Woofer:</b>	3.5" (98mm) Anodized aluminum cone & Santoprene™ surround	10" (254mm) dual voice coil, polypropylene & Santoprene surround
<b>Frequency Response:</b>	80Hz - 20kHz +/-3dB	35Hz - 100Hz +/-3dB
<b>Crossover Frequency:</b>	-	100Hz
<b>Impedance:</b>	30 Ohms nominal	8 Ohms nominal per voice coil
<b>System Impedance:</b>	8 Ohms nominal	8 Ohms nominal
<b>Power Handling:</b>	50 watts minimum; 200 watts maximum	200 Watts
<b>Sensitivity:</b>	87dB 2.83V / 1 meter	90dB Sensitivity @ 2.83V / 1 meter
<b>Enclosure Material:</b>	Non-corrosive, high-heat ABS sealed enclosure	High Density Polyethylene (HDPE) non-corrosive sealed enclosure
<b>Mounting Threads:</b>	1/2" NPS (National Pipe Standard)	-
<b>Dimensions (L x Dia.):</b>	6.5" L x 4.125" Dia. (165mm x 105mm)	24.8" x 15" (630mm x 381mm)
<b>Shipping Weight:</b>	5.0lbs (2.4kg) each	40 lbs (19kg)

### LIMITED THREE (3) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will, at its option and expense, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. **Please visit our website and owner's e-Manual for complete warranty and exclusion information.**

©2019 Sonance. All rights reserved. Sonance is a registered trademark of Dana Innovations.

Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website: [www.sonance.com](http://www.sonance.com)

991 Calle Amanecer • San Clemente, CA 92673 USA • (949) 492-7777 • FAX: (949) 361-5151 • Technical Support: (949) 492-7777

02.14.19