

2.5" SATA SSD

3TG6-P Series

Customer: _____
Customer
Part
Number: _____
Innodisk
Part
Number: _____
Innodisk
Model Name: _____
Date: _____

Innodisk Approver	Customer Approver

**Total Solution For
Industrial Flash Storage**

Features:

- SATA III
- Innodisk 3D TLC NAND
- 2.5" SATA SSD
- Standard & Wide-temperature
- iPowerguard
- iDataguard
- Dynamic Thermal Management

Power Requirements:

Input Voltage:	5V±5%
Max Operating Wattage:	5.9W
Idle Wattage:	3.3W

Performance:

- Sequential Read up to 560 MB/s
- Sequential Write up to 520 MB/s

Reliability:

Capacity	TBW	DWPD
128GB	289	2.1
256GB	578	2.1
512GB	1154	2.1
1TB	2308	2.1
2TB	4615	2.1
4TB	9231	2.1
8TB	18462	2.1

Data Retention	1 Year
Warranty	3 Years

For warranty details, please refer to:

https://www.innodisk.com/en/support_and_service/warranty

Table of contents

- LIST OF FIGURES8**
- 1. PRODUCT OVERVIEW9**
 - 1.1 INTRODUCTION OF INNODISK 2.5" SATA SSD 3TG6-P 9**
 - 1.2 PRODUCT VIEW AND MODELS 9**
 - 1.3 SATA INTERFACE..... 10**
 - 1.4 2.5-INCH FORM FACTOR 10**
- 2. PRODUCT SPECIFICATIONS 11**
 - 2.1 CAPACITY AND DEVICE PARAMETERS..... 11**
 - 2.2 PERFORMANCE 11**
 - 2.3 ELECTRICAL SPECIFICATIONS 12**
 - 2.3.1 Power Requirement 12*
 - 2.3.2 Power Consumption 13*
 - 2.4 ENVIRONMENTAL SPECIFICATIONS 14**
 - 2.4.1 Temperature Ranges 14*
 - 2.4.2 Humidity 14*
 - 2.4.3 Shock and Vibration 14*
 - 2.4.4 Mean Time between Failures (MTBF) 14*
 - 2.5 CE AND FCC COMPATIBILITY 14**
 - 2.6 RoHS COMPLIANCE 14**
 - 2.7 RELIABILITY 15**
 - 2.8 TRANSFER MODE 15**
 - 2.9 PIN ASSIGNMENT 16**
 - 2.10 MECHANICAL DIMENSIONS..... 17**
 - 2.11 ASSEMBLY WEIGHT 19**
 - 2.12 SEEK TIME 19**
 - 2.13 HOT PLUG..... 19**
 - 2.14 NAND FLASH MEMORY 19**
- 3. THEORY OF OPERATION20**
 - 3.1 OVERVIEW..... 20**
 - 3.2 SATA CONTROLLER 20**
 - 3.3 ERROR DETECTION AND CORRECTION..... 20**
 - 3.4 WEAR-LEVELING 21**
 - 3.5 BAD BLOCKS MANAGEMENT 21**
 - 3.6 iDATA GUARD..... 21**
 - 3.7 GARBAGE COLLECTION/TRIM 21**
 - 3.8 iCELL TECHNOLOGY (OPTIONAL) 22**
 - 3.9 iPOWER GUARD..... 22**

- 3.10 DIE RAID 22**
- 3.11 QUICK ERASE (OPTIONAL)..... 22**
 - 3.11.1 Quick Erase Command..... 23*
- 4. INSTALLATION REQUIREMENTS 24**
 - 4.1 2.5" SATA SSD 3TG6-P PIN DIRECTIONS..... 24**
 - 4.2 ELECTRICAL CONNECTIONS FOR 2.5" SATA SSD 3TG6-P 24**
 - 4.3 FORM FACTOR..... 24**
 - 4.4 DEVICE DRIVE 25**
- 5. SMART FEATURE SET 26**
 - 5.1 SMART ATTRIBUTES..... 27**
- 6. PART NUMBER RULE 28**

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	July, 2018
Preliminary 0.1	Add performance and housing drawing for 4TB	Aug., 2018
Rev 1.0	Add TBW information	Sep., 2018
Rev 1.1	Modify Performance Table for 2TB and 4TB	Dec., 2018
Rev 1.2	Add Quick Erase Operation	Dec., 2018
Rev 1.3	Modify Mechanical Dimensions Modify LBA for 4TB Delete DEVSLP & Slumber Mode on Power Consumption Table	Jan., 2019
Rev 1.4	Modify Performance Table Update Power Consumption Table Modify SMART Attributes Table	Jan., 2019
Rev 1.5	Update Power Consumption Table Modify Performance Table	Mar., 2019
Rev 1.6	Add TRIM note Modify Power Consumption Table Update RoHS report	Apr., 2019
Rev 1.7	Add Die RAID Modify SMART Attributes Table	May, 2019
Rev 1.8	Modify Performance Table Update RoHS report with 2019 version Add CE/FCC Certification	May, 2019
Rev 1.9	Modify Performance Table Add UL Certification	Sep., 2019
Rev 2.0	Add 4TB single PCB information	Feb., 2020
Rev 2.1	Update Power consumption table	May, 2020
Rev 2.2	Add 8TB information	Aug., 2020
Rev 2.3	Add Kioxia 64 Layers 3D TLC & Kioxia 96 Layers 3D TLC information	Oct., 2020
Rev 2.4	Modify Performance & Power Consumption Information	Oct., 2020
Rev 2.5	Add 256GB with Kioxia 96 Layers 3D TLC information Modify 512GB with Kioxia 96 Layers 3D TLC information Revise Storage temperature range	Dec., 2020
Rev 2.6	Modify Performance table	Feb., 2021

Rev 2.6.1	Modify the description of mechanism	Apr., 2021
Rev 3.0	Add 112L 3D TLC Information	Jul., 2021
Rev 3.1	Update TBW	Aug., 2021
Rev 3.2	Modify Performance data	Aug., 2021
Rev 3.2.1	Update feature	Aug., 2021

List of Tables

TABLE 1: DEVICE PARAMETERS	11
TABLE 2: PERFORMANCE- 64 LAYERS 3D TLC¹	11
TABLE 3: PERFORMANCE- 96 LAYERS 3D TLC¹	12
TABLE 4: PERFORMANCE- 112 LAYERS 3D TLC¹	12
TABLE 5: INNODISK 2.5" SATA SSD 3TG6-P POWER REQUIREMENT	12
TABLE 6: POWER CONSUMPTION –64 LAYERS 3D TLC	13
TABLE 7: POWER CONSUMPTION –96 LAYERS 3D TLC	13
TABLE 8: POWER CONSUMPTION –112 LAYERS 3D TLC	13
TABLE 9: TEMPERATURE RANGE FOR 2.5" SATA SSD 3TG6-P	14
TABLE 10: SHOCK/VIBRATION TESTING FOR 2.5" SATA SSD 3TG6-P	14
TABLE 11: 2.5" SATA SSD 3TG6-P MTBF	14
TABLE 12: INNODISK 2.5" SATA SSD 3TG6-P PIN ASSIGNMENT	16
TABLE 13: EXECUTE QUICK ERASE COMMAND FOR INPUTS INFORMATION	23
TABLE 14: QUICK ERASE COMMAND FOR NORMAL OUTPUT INFORMATION	23

List of Figures

FIGURE 1: INNODISK 2.5" SATA SSD 3TG6-P	9
FIGURE 2: INNODISK 2.5" SATA SSD 3TG6-P BLOCK DIAGRAM	20
FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT	24
FIGURE 4: 2.5" SATA SSD 3TG6-P MECHANICAL SCREW HOLE	25

1. Product Overview

1.1 Introduction of Innodisk 2.5" SATA SSD 3TG6-P

Innodisk 2.5" SATA SSD 3TG6-P products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk 2.5" SATA SSD 3TG6-P is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. The SSD have good performance, no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

CAUTION *TRIM must be enabled.*

TRIM enables SSD's controller to skip invalid data instead of moving. It can free up significant amount of resources, extends the lifespan of SSD by reducing erase, and write cycles on the SSD. Innodisk's handling of garbage collection along with TRIM command improves write performance on SSDs.

1.2 Product View and Models

Innodisk 2.5" SATA SSD 3TG6-P is available in follow capacities:

- 2.5" SATA SSD 3TG6-P 128GB
- 2.5" SATA SSD 3TG6-P 256GB
- 2.5" SATA SSD 3TG6-P 512GB
- 2.5" SATA SSD 3TG6-P 1TB
- 2.5" SATA SSD 3TG6-P 2TB
- 2.5" SATA SSD 3TG6-P 4TB
- 2.5" SATA SSD 3TG6-P 8TB



Figure 1: Innodisk 2.5" SATA SSD 3TG6-P

1.3 SATA Interface

Innodisk 2.5" SATA SSD 3TG6-P supports SATA III interface, and backward compliant with SATA I and SATA II.

1.4 2.5-inch Form Factor

The Industry-standard 2.5-inch form factor design with metal material case is easy for installation, which has a compact design 69.85mm (W) x 100.00mm (L) x 7.00mm (H)

2. Product Specifications

2.1 Capacity and Device Parameters

2.5" SATA SSD 3TG6-P device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
128GB	234441648	16383	16	63	114473
256GB	468862128	16383	16	63	228936
512GB	937703088	16383	16	63	457862
1TB	1875385008	16383	16	63	915715
2TB	3750748848	16383	16	63	1831420
4TB	7501497696	16383	16	63	3662840
8TB	15002995392	16383	16	63	7325681

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance- 64 Layers 3D TLC¹

Capacity	128GB	256GB	512GB	1TB	2TB	4TB ²	4TB	8TB
Sequential ³ Read (max.)	560 MB/s	560 MB/s	560 MB/s	530 MB/s	520 MB/s	490 MB/s	510 MB/s	490 MB/s
Sequential ³ Write (max.)	130 MB/s	280 MB/s	520 MB/s	460 MB/s	440 MB/s	400 MB/s	460 MB/s	410 MB/s
4KB Random ³ Read (QD32)	40,000 IOPS	73,000 IOPS	75,000 IOPS	87,000 IOPS	77,000 IOPS	73,000 IOPS	8,000 IOPS	6,000 IOPS
4KB Random ³ Write (QD32)	33,000 IOPS	53,000 IOPS	64,000 IOPS	61,000 IOPS	60,000 IOPS	53,000 IOPS	50,000 IOPS	46,000 IOPS

Note: 1. Performance based on CrystalDiskMark 5.1.2 with file size 1000MB of Queue Depth 32

2. Single PCB inside

3. Performance may vary based on various firmware version or test platform

Table 3: Performance- 96 Layers 3D TLC¹

Capacity	256GB	512GB	1TB	2TB	4TB ²
Sequential ³ Read (max.)	550 MB/s	550 MB/s	510 MB/s	490 MB/s	500 MB/s
Sequential ³ Write (max.)	140 MB/s	310 MB/s	440 MB/s	440 MB/s	440 MB/s
4KB Random ³ Read (QD32)	43,000 IOPS	74,000 IOPS	80,000 IOPS	80,000 IOPS	65,000 IOPS
4KB Random ³ Write (QD32)	36,000 IOPS	63,000 IOPS	57,000 IOPS	55,000 IOPS	55,000 IOPS

Note: 1. Performance based on CrystalDiskMark 6.0.2 with file size 1000MB of Queue Depth 32

2. Single PCB inside

3. Performance may vary based on various firmware version or test platform

Table 4: Performance- 112 Layers 3D TLC¹

Capacity	128GB	256GB	512GB	1TB	2TB	4TB ²
Sequential ³ Read (max.)	410 MB/s	550 MB/s	550 MB/s	510 MB/s	510 MB/s	450 MB/s
Sequential ³ Write (max.)	90 MB/s	180 MB/s	350 MB/s	450 MB/s	460 MB/s	430 MB/s
4KB Random ³ Read (QD32)	29,000 IOPS	55,000 IOPS	70,000 IOPS	73,000 IOPS	73,000 IOPS	73,000 IOPS
4KB Random ³ Write (QD32)	23,000 IOPS	45,000 IOPS	63,000 IOPS	57,000 IOPS	57,000 IOPS	57,000 IOPS

Note: 1. Performance based on CrystalDiskMark 6.0.2 with file size 1000MB of Queue Depth 32

2. Single PCB inside

3. Performance may vary based on various firmware version or test platform

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 5: Innodisk 2.5" SATA SSD 3TG6-P Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 6: Power Consumption –64 Layers 3D TLC

Mode	128GB (mA)	256GB (mA)	512GB (mA)	1TB (mA)	2TB (mA)	4TB ² (mA)	4TB (mA)	8TB (mA)
Read(RMS) ¹	355	378	419	471	485	562	912	984
Write(RMS) ¹	292	399	543	624	616	724	1066	1140
Idle	171	176	181	186	211	223	603	661
Boot-Up	334	274	285	442	558	551	2240	2456

Note: 1. The workload based on IOMeter with file size 1MBytes with Queue Depth 32 sequential read & write
 2. Single PCB inside

Table 7: Power Consumption –96 Layers 3D TLC

Mode	256GB (mA)	512GB (mA)	1TB (mA)	2TB (mA)	4TB ² (mA)
Read(RMS) ¹	362	467	528	540	588
Write(RMS) ¹	341	480	670	675	670
Idle	206	204	223	232	252
Boot-Up	650	674	672	664	670

Note: 1. The workload based on IOMeter with file size 1MBytes with Queue Depth 32 sequential read & write
 2. Single PCB inside

Table 8: Power Consumption –112 Layers 3D TLC

Mode	128GB (mA)	256GB (mA)	512GB (mA)	1TB (mA)	2TB (mA)	4TB ² (mA)
Read(RMS) ¹	273	382	501	500	502	519
Write(RMS) ¹	319	382	496	657	647	665
Idle	228	234	234	267	260	260
Boot-Up	508	613	676	866	1000	1030

Note: 1. The workload based on IOMeter with file size 1MBytes with Queue Depth 32 sequential read & write
 2. Single PCB inside

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 9: Temperature range for 2.5" SATA SSD 3TG6-P

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-40°C to +85°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 10: Shock/Vibration Testing for 2.5" SATA SSD 3TG6-P

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various 2.5" SATA SSD 3TG6-P configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 11: 2.5" SATA SSD 3TG6-P MTBF

Product	Condition	MTBF (Hours)
Innodisk 2.5" SATA SSD 3TG6-P	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

2.5" SATA SSD 3TG6-P conforms to CE and FCC requirements.

2.6 RoHS Compliance

2.5" SATA SSD 3TG6-P is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value	
Flash endurance	3,000 P/E cycles	
Error Correct Code	Support	
Data Retention	Under 40 °C: 10 Years at Initial NAND status (PE cycles under 100) ; 1 Year at NAND Life End (PE cycles reach 3,000)	
TBW* (Total Bytes Written) Unit:TB		
Capacity	Sequential workload	Client workload
128GB	341	289
256GB	682	578
512GB	1364	1154
1TB	2663	2308
2TB	5327	4615
4TB	10654	9231
8TB	21308	18462
*Note: 1. Sequential: Mainly sequential write. 2. Client: Follow JESD218 Test method and JESD219A Workload, tested by ULINK. (The capacity lower than 64GB client workload is not specified in JEDEC219A, the values are estimated.) 3. Based on out-of-box performance.		

2.8 Transfer Mode

2.5" SATA SSD 3TG6-P support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

2.9 Pin Assignment


Innodisk 2.5" SATA SSD 3TG6-P uses a standard SATA pin-out. See Table 8 for 2.5" SATA SSD 3TG6-P pin assignment.

Table 12: Innodisk 2.5" SATA SSD 3TG6-P Pin Assignment


Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions


* DGS25-XXXM71EXXQF & DGS25-XXXM71GXXQF & DGS25-XXXM71KXXQF / DGS25-04TM71EXBQF (Single Board)

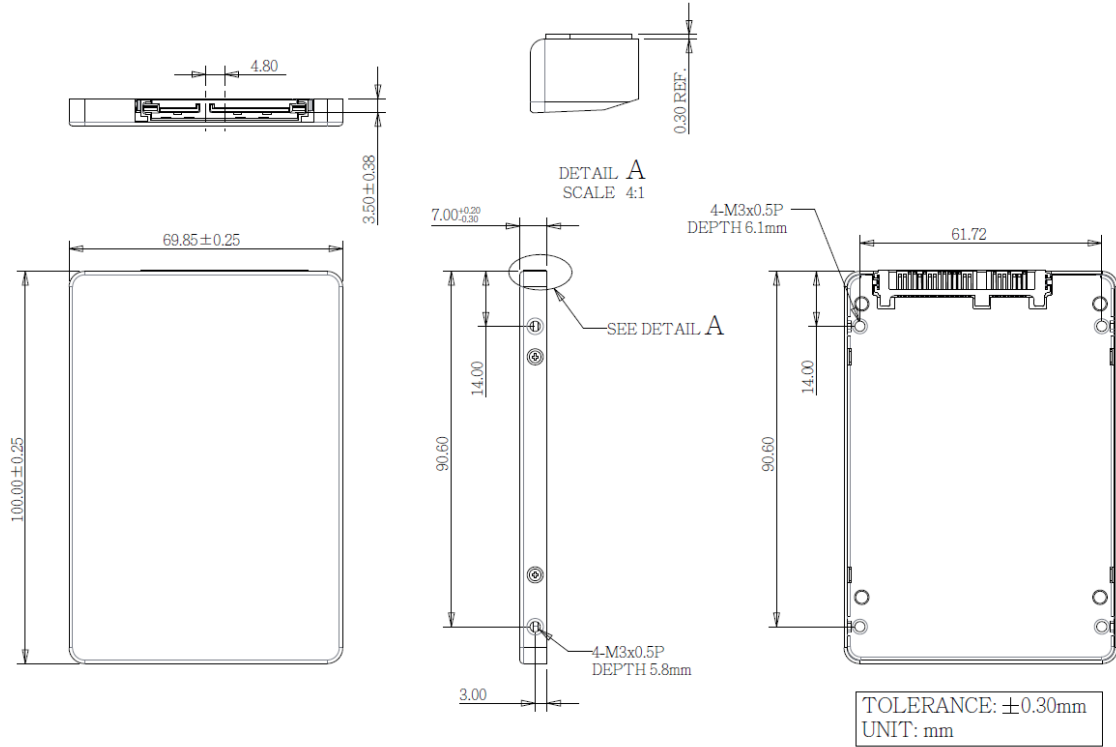

* DGS25-XXXM71EX3QF / DGS25-XXXM71GCCQF/ DGS25-XXXM71KCCQF

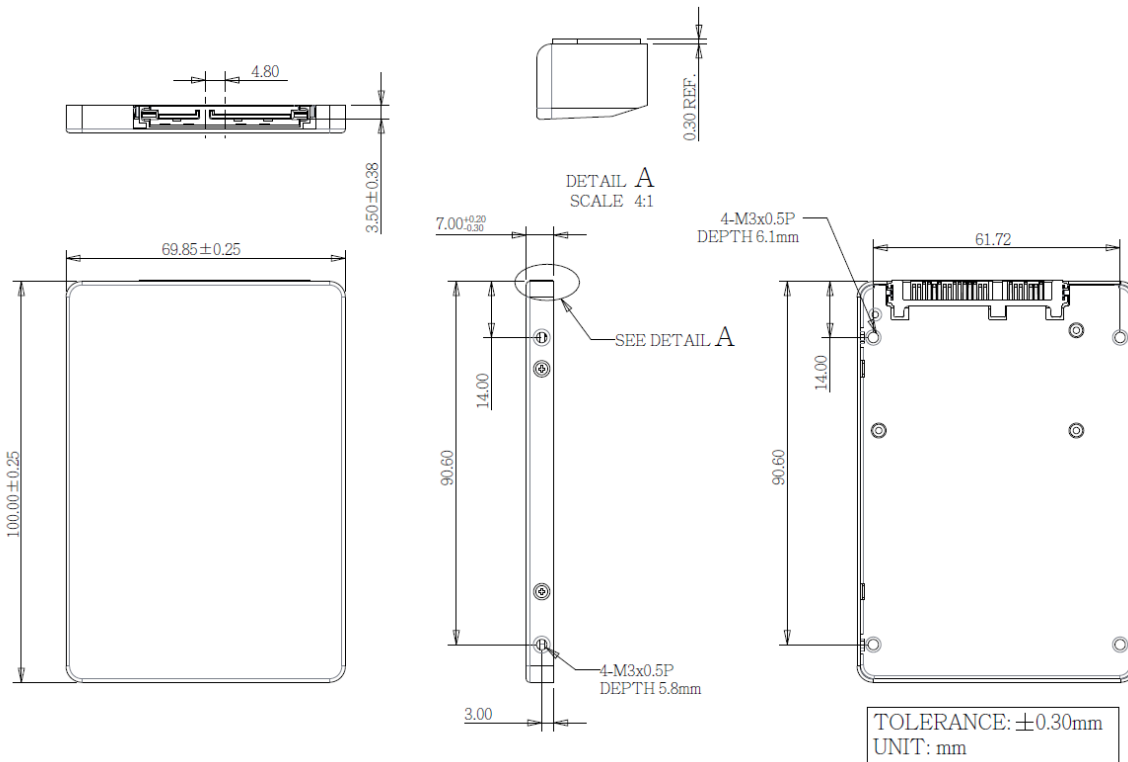

***DGS25-04TM71EXAQF/DGS25-08TM71EXBQF (Dual Board)**

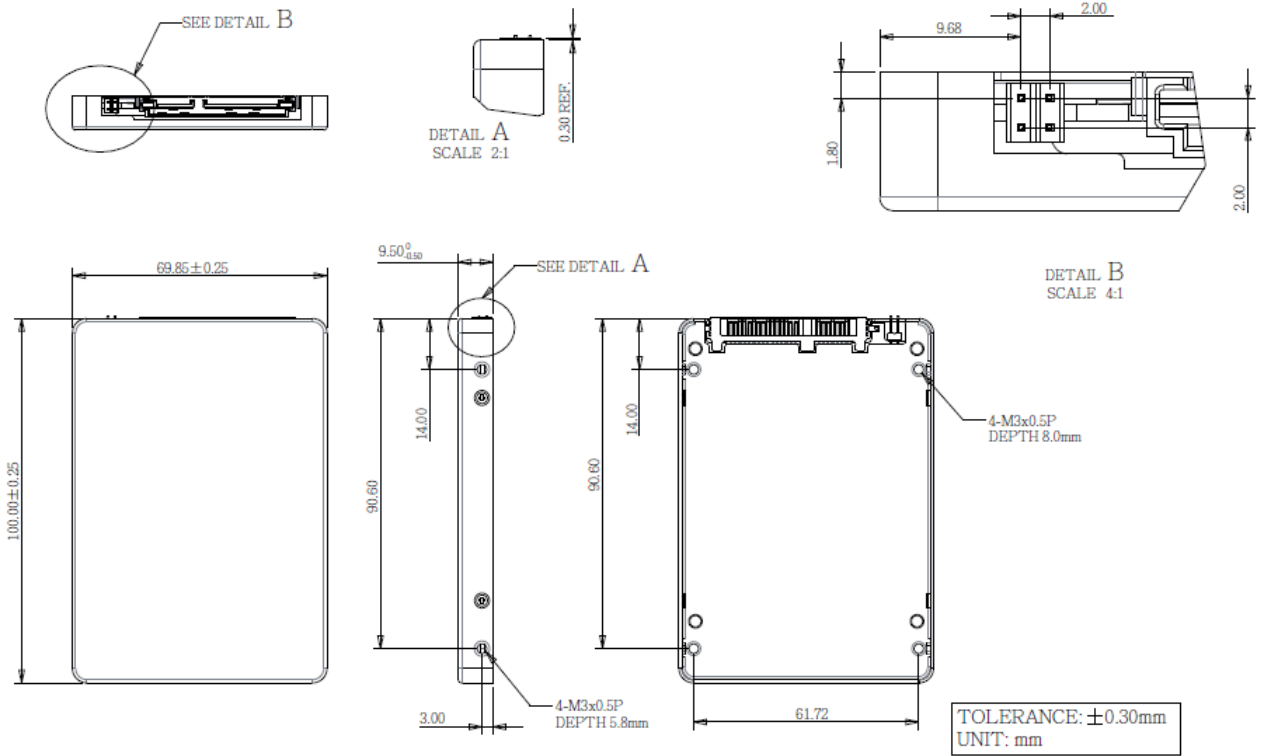

2.11 Assembly Weight

An Innodisk 2.5" SATA SSD 3TG6-P within 3D TLC flash ICs, 2TB's weight is 90 grams approx.

2.12 Seek Time

Innodisk 2.5" SATA SSD 3TG6-P is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug: The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk 2.5" SATA SSD 3TG6-P uses 3D TLC NAND flash memory, with 3,000 program & erase cycles, which is non-volatility, high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk 2.5" SATA SSD 3TG6-P from the system level, including the major hardware blocks.

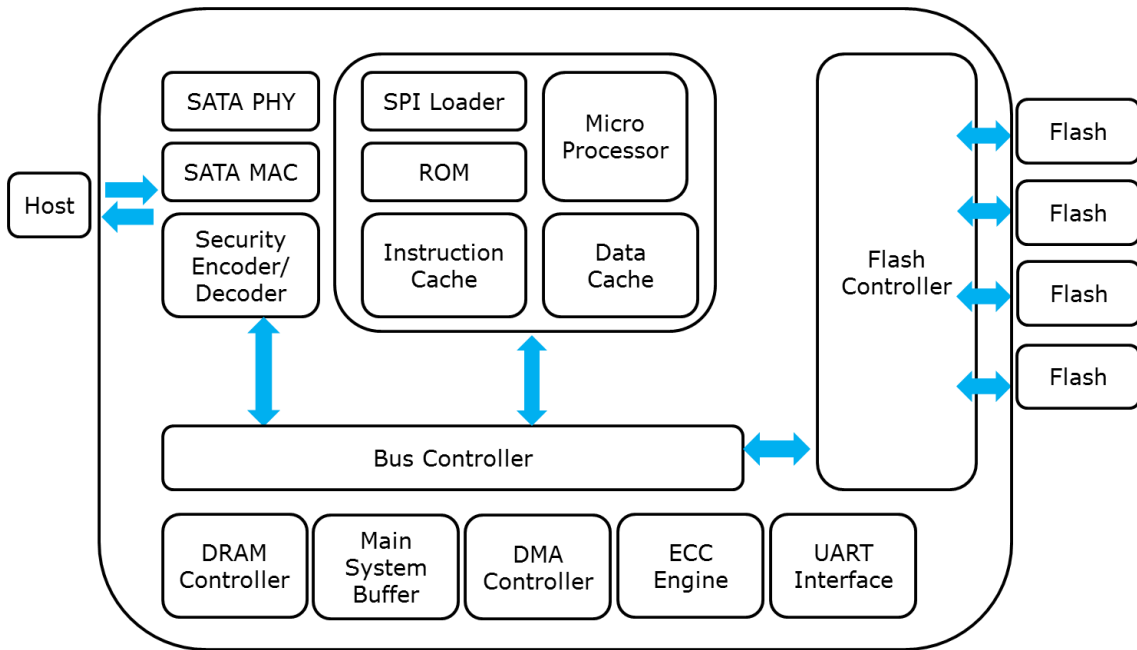


Figure 2: Innodisk 2.5" SATA SSD 3TG6-P Block Diagram

Innodisk 2.5" SATA SSD 3TG6-P integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

* iCell is optional feature with different part number.

3.2 SATA Controller

Innodisk 2.5" SATA SSD 3TG6-P is designed with 88SS1080, a SATA III 6.0Gbps controller, The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 Error Detection and Correction

Innodisk 2.5" SATA SSD 3TG6-P is designed with hardware LDPC ECC engine with hard-decision and soft-decision decoding. Low-density parity-check (LDPC) codes have excellent error correcting performance close to the Shannon limit when decoded with the belief-propagation (BP) algorithm using soft-decision information.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 2.5" SATA SSD 3TG6-P uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 iData Guard

Innodisk's iData Guard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's iData Guard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection/TRIM

Garbage collection and TRIM technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.8 iCell Technology (Optional)

iCell circuit is designed with several capacitors to be able to provide power after host power off. The SSD controller can write all DRAM buffer data to flash, so that is why 2.5" SATA SSD 3TG6-P can ensure all data can be written to disk without any data loss. Once the SSD controller receives this feedback signal, the SSD firmware triggers a mechanism to write the data into flash storage. As a result, iCell is able to provide power during power outage, preventing any data loss from happening.

Note: 4TB & 8TB capacity doesn't support iCell function.



Figure 3: Diagram of 2.5" SATA SSD with iCell

3.9 iPower Guard

iPower Guard technology is a set of preventive measures that protect the SSD in an unstable power supply environment. This comprehensive package comprises safeguards for start-up and shut-down to maintain device performance and ensure data integrity.

3.10 Die RAID

Die RAID is a controller function which leveraged user capacity to back up the data in NAND flash. Die RAID supported can ensure the user data in the NAND Flash more consistent in certain scenario. Innodisk 2.5" SATA SSD 3TG6-P series is default enable the Die RAID function for the industrial application.

3.11 Quick Erase (Optional)

Quick Erase function is designed for emergency data erase in few seconds by providing ATA command.

3.11.1 Quick Erase Command

- Protocol: No Data

-Inputs

Table 13: Execute Quick Erase command for inputs information

Register	7	6	5	4	3	2	1	0
Features	21h							
Sector Count	41h							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	1	1	1	0	Na			
Command	82h							

-Normal Outputs

Table 14: Quick Erase command for normal output information

Register	7	6	5	4	3	2	1	0
Error	Na							
Sector Count	Na							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	obs	Na	obs	DEV	Na	Na	Na	Na
Status	BSY	DRDY	DF	Na	DRQ	Na	Na	ERR

Device register-

DEV shall specify the selected device.

Status register

BSY will be cleared to zero indicating command completion

DRDY will be set to one.

DF (Device Fault) will be cleared to zero.

DRQ will be cleared to zero

ERR will be cleared to zero.

4. Installation Requirements

4.1 2.5" SATA SSD 3TG6-P Pin Directions

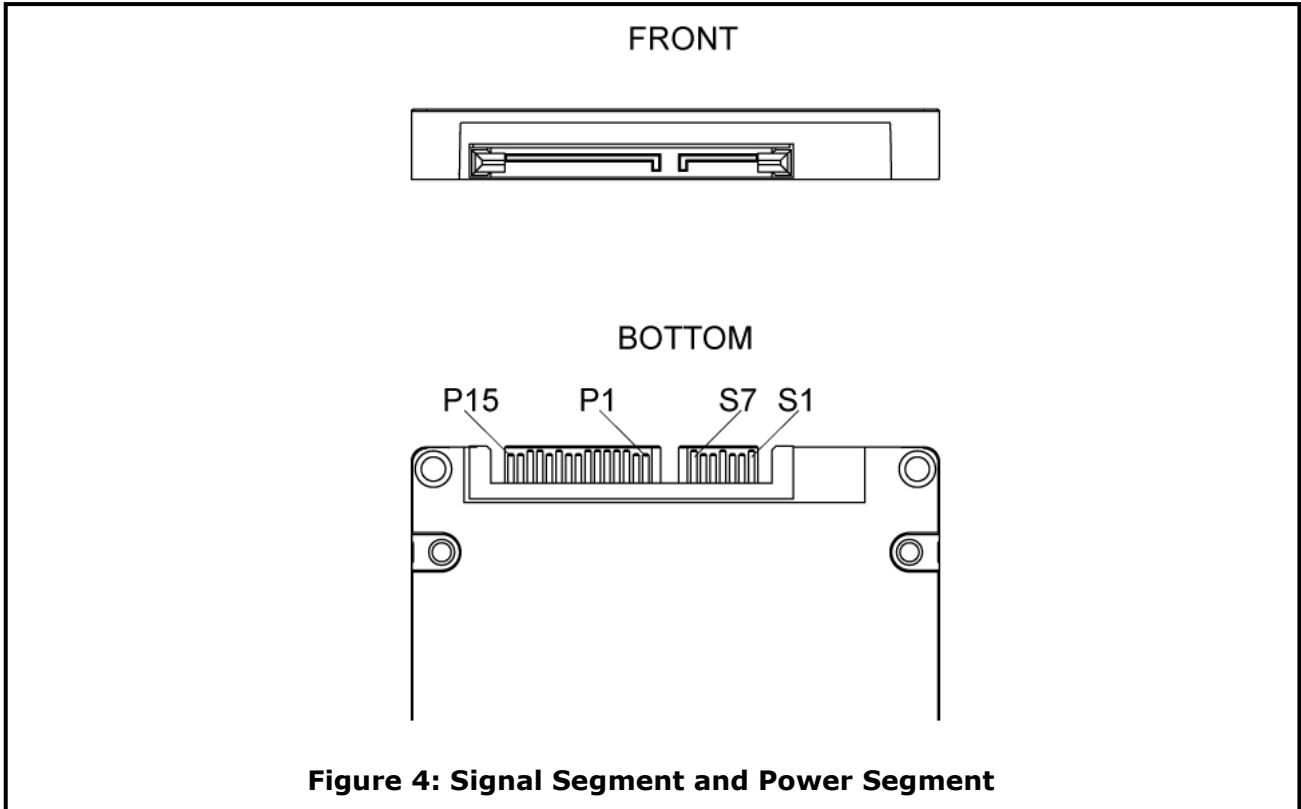


Figure 4: Signal Segment and Power Segment

4.2 Electrical Connections for 2.5" SATA SSD 3TG6-P

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1 meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Form Factor

Please prepare following things:

- Screw driver.
- Four M3 screws. (Torque value is 2.0 ~ 2.5 Kgf.cm)
- SATA single cable (7-pin, Maximum length 1 meter).
- SATA power cable (15-pin).

Please turn off your computer, and open your computer's case. Find one of available 2.5-inch slot, and plug the SSD in. To use the screws fix the SSD. Plug in the SATA single cable, and power cable. Please boot the installation Operation System from CD-ROM, and install Operation System into SSD.

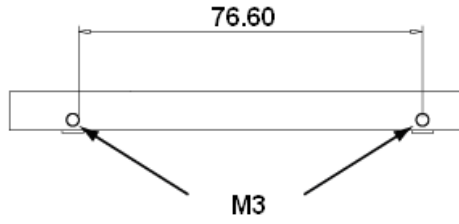


Figure 5: 2.5" SATA SSD 3TG6-P Mechanical Screw Hole

4.4 Device Drive

No additional device drives are required. Innodisk 2.5" SATA SSD 3TG6-P can be configured as a boot device.

5. SMART Feature Set

Innodisk 3TG6-P series support the SMART command set and defines some vendor-specific data to report SMART attributes of SSD.

Value	Command
D0h	Read Data
D1h	Read Attribute Threshold
D2h	Enable/Disable Autosave
D3h	Save Attribute Values
D4h	Execute OFF-LINE Immediate
D5h	Read Log
D6h	Return Status
D8h	Enable SMART Operations
D9h	Disable SMART Operations
DAh	Return Status

5.1 SMART Attributes

Innodisk 3TG6-P series SMART data attributes are listed in following table.

Attribute ID (hex)	Raw Attribute Value							Attribute Name
	LSB			MSB				
5 (05h)	LSB			MSB	00	00	00	Later Bad
9 (09h)	LSB			MSB	00	00	00	Power-On hours Count
12 (0Ch)	LSB			MSB	00	00	00	Drive Power Cycle Count
163 (A3h)	LSB					MSB	00	Total Bad Block Count
165 (A5h)	LSB			MSB	00	00	00	Max Erase count
167 (A7h)	LSB			MSB	00	00	00	Avg Erase count
169 (A9h)	LSB	00	00	00	00	00	00	Device Life
170 (AAh)	LSB					MSB	00	Spare Block Count
171 (ABh)	LSB					MSB	00	Program fail count
172 (ACh)	LSB					MSB	00	Erase fail count
184 (B8h)	LSB			MSB	00	00	00	Error Corrected Count
187 (BBh)	LSB			MSB	00	00	00	Reported Uncorrect Count
192 (C0h)	LSB			MSB	00	00	00	Unexpected Power Loss Count
194 (C2h)	Cur.*	00	MIN	00	MAX	03	Cur.*	Temperature
229 (E5h)	ID 0	ID 1	ID 2	ID 3	ID 4	ID 5	00	Flash ID
235 (EBh)		MSB	LSB	MSB	LSB	MSB	LSB	Later bad block info (Read/Write/Erase)
241 (F1h)	LSB					MSB	00	Total LBA written(LBA=32MB)
242 (F2h)	LSB					MSB	00	Total LBA read(LBA=32MB)

Cur. * =Current

6. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	D	G	S	2	5	-	A	2	8	M	7	1	E	C	1	Q	F	(P)	-	X	X
Description	Disk	2.5" SATA SSD				Capacity			Category	Flash mode	Operation Temp.	Internal Control	CH.	Flash	icell	Customized Code					
Definition																					
Code 1st (Disk)											Code 13th (Flash mode)										
D : Disk											E: 64 layers 3D TLC										
											G: 96 layers 3D TLC										
											K: 112 layers 3D TLC										
Code 2nd ~ 5th (Form Factor)											Code 14th (Operation Temperature)										
GS25: 2.5" SATA SSD											C: Standard Grade (0°C~ +70°C)										
Code 7th ~9th (Capacity)											W: Industrial Grade (-40°C~ +85°C)										
A28: 128GB											Code 15th (Internal control)										
B56: 256GB											1/A/B: PCB type										
C12:512GB											3/C: Slim inside										
01T: 1TB																					
02T: 2TB																					
04T: 4TB											Code 16th (Channel of data transfer)										
08T: 8TB											Q: Quad Channels										
Code 10th ~12th (Series)																					
M71: SATA 3TG6-P																					
											Code 17th (Flash Type)										
											F: Kioxia 3D TLC										
											Code 18th (iCell)										
											P: Optional										
											Code 20th ~21th (Customized code)										