


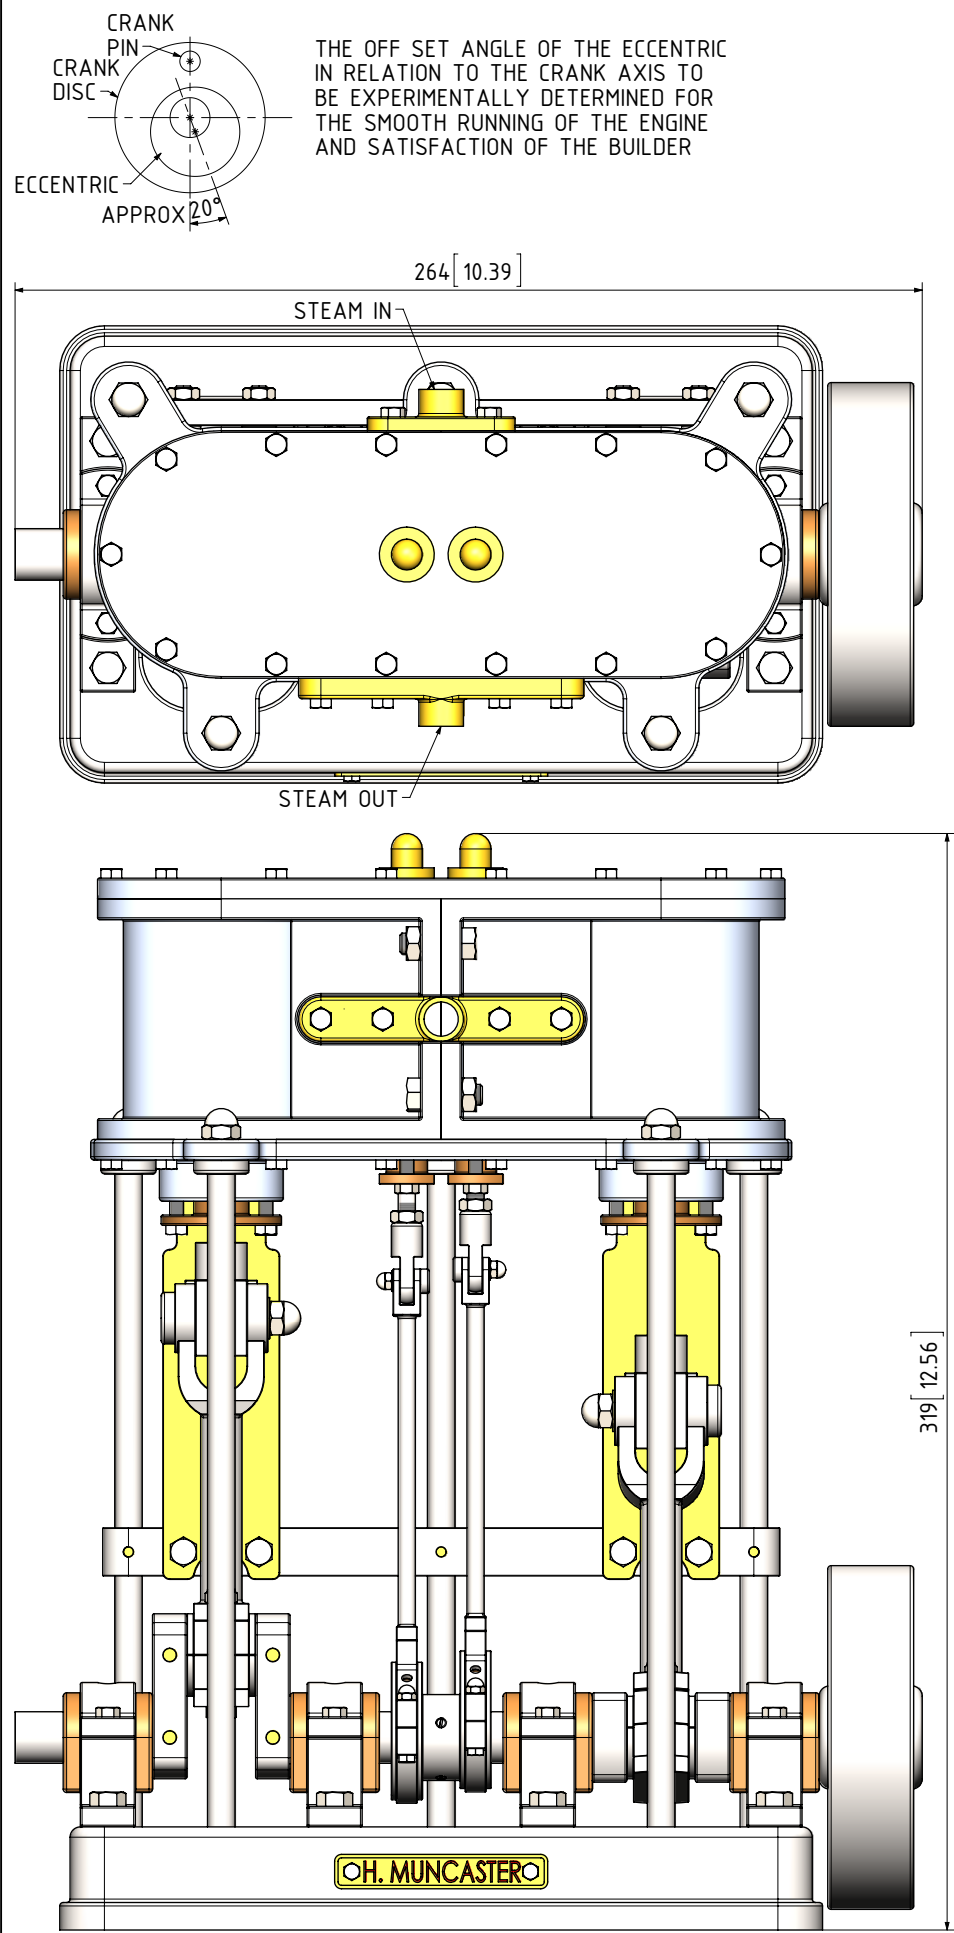

NOTES:

0. ALL DRAWINGS ARE IN METRIC MEASUREMENTS
1. ALL ENGINEERING PRACTICES SHALL BE APPLIED WITH REGARDS TO HOLE AND SHAFT TOLERANCES.
2. WHERE SCREWS OR BOLTS ARE USED THE CLEARANCE HOLES SHALL BE APPROXIMATELY 5% TO 8% LARGER THAN THE MATCHING TAPPED HOLE.
3. PREFERABLY ALL TAPPED HOLES AND MATCHING SCREWS AND/OR BOLTS TO BE METRIC FINE (MF)
4. MATERIALS SPECIFIED ON THE DRAWINGS ARE INDICATIVE ONLY. THE BUILDER CAN MAKE HIS/HER OWN MATERIAL CHOICE.
5. ALL CONNECTIONS/JOINTS WHICH HAVE STEAM PRESSURE APPLIED TO IT SHALL BE SILVER/HARD SOLDERED.
6. COMPRESSION SPRINGS ARE DRAWN IN COMPRESSED STATE (CP), UNCOMPRESSED STATE IS APPROX 40% TO 60% LONGER THEN COMPRESSED STATE.
7. WHERE PREFERRED SCREW OR RIVETED CONNECTIONS CAN BE OMITTED AND PARTS CAN BE BONDED TOGETHER BY USING EITHER HIGH STRENGTH GLUE, EPOXY RESIN, OR SOLDER.
8. PARTS WHICH ARE DIRECTLY EXPOSED TO STEAM AND/OR WATER SHOULD BE CONSTRUCTED USING NON-FERROUS OR NON CORROSIVE MATERIAL SUCH AS BRASS, BRONZE, GUNMETAL, STAINLESS STEEL, COPPER OR MONEL.
9. THE ORDER IN WHICH THE PARTS/COMPONENTS ARE MANUFACTURED AND THE MODEL IS ASSEMBLED IS ENTIRELY LEFT TO THE BUILDER/MODEL MAKER.
10. A COLOUR SCHEME FOR THIS PROJECT IS ENTIRELY LEFT UP TO THE MODEL MAKER.
11. THE MANNER IN WHICH THE PARTS/COMPONENTS ARE MANUFACTURED IS ENTIRELY LEFT UP TO THE BUILDER.
12. USE LOCTITE, ON SCREW OR PRESS FIT CONNECTIONS OR SURFACES, WERE DEEMED NECESSARY TO PREVENT PARTS FROM LOOSENING.
13. WASHER SHALL BE USED WHERE DEEMED NECESSARY.
- XX. ERRORS AND/OR OMISSIONS MAY OCCUR IN THE DRAWINGS, DO NOT HESITATE TO CONTACT ME SO THAT THE ERRORS/OMISSIONS CAN BE RECTIFIED.

OTHER ABBREVIATIONS

DP = DEEP
DAA= DRILL AFTER ASSEMBLY
D&TAA= DRILL AND TAP AFTER ASSEMBLY
CF = CLOSE FIT (SIZE FOR SIZE)
PF = PRESS FIT
PFAA= PRESS FIT AFTER ASSEMBLY
PCD = PITCH CIRCLE DIAMETER
RM = REAM
HEX = HEXACON, 6SIDED
CP = COMPRESSED
KNL = KNURLED
CSK = COUNTERSINK
PL = PLACES
DWL= DOWEL
(T)HESOP=(TAPPED)HOLES EQUALLY SPACED ON PCD
(T)HESOC=(TAPPED)HOLES EQUALLY SPACED ON CIRCUMFERENCE
[SA-xxx]= SUB ASSEMBLY-xxx

MATERIAL ABBREVIATIONS:

ALU = ALUMINIUM/HARD ALUMINIUM
BRS = BRASS
BRZ = BRONZE OR GUNMETAL (BRZ/GM)
CI = CAST IRON
CU = COPPER
GRA = GRAPHITE
MS = MILD STEEL/BRIGHT MILD STEEL
S/S = SILVER STEEL OR STAINLESS STEEL
SPS = SPRING STEEL
PEEK= POLYETHER ETHER KETONE
SYN = SYNTHETIC MATERIAL SUCH AS VETON, NYLON, TEFLON OR RUBBER
IN GENERAL SYNTHETIC MATERIALS SOULD BE ABLE TO WITHSTAND THE HEAT AND PRESSURE(S) APPLIED TO THEM.
nnn/nnn MEANS THAT EITHER MATERIAL CAN BE USED

QTY.	PART NUMBER
1	MUNCASTER6.1-1-01-BASE BED PLATE
4	MUNCASTER6.1-1-02-MAIN BEARING BLOCK
4	MUNCASTER6.1-1-03-MAIN BEARING
2	MUNCASTER6.1-1-04-CYL PLATFORM SUPPORT PILLAR
3	MUNCASTER6.1-1-04-CYL PLATFORM SUPPORT PILLAR
1	MUNCASTER6.1-1-05-CYLINDER PLATFORM
2	MUNCASTER6.1-1-06-PISTON ROD SLIDE BEARING
2	MUNCASTER6.1-1-07-PISTON ROD SEAL
2	MUNCASTER6.1-1-08-PISTON ROD GLAND
2	MUNCASTER6.1-1-09-VALVE ROD SLIDE BEARING
2	MUNCASTER6.1-1-10-VALVE ROD SEAL
2	MUNCASTER6.1-1-11-VALVE ROD GLAND
1	MUNCASTER6.1-1-12-CROSSHEAD SLIDING PLATE BRACKET
4	MUNCASTER6.1-1-13-CROSSHEAD SLIDING PLATE SPACER
2	MUNCASTER6.1-1-14-CROSSHEAD SLIDING PLATE
2	MUNCASTER6.1-1-15-CYLINDER
1	MUNCASTER6.1-1-16-CYLINDERS TOP COVER
1	MUNCASTER6.1-1-17-EXHAUST PORT COVER
1	MUNCASTER6.1-1-18-STEAM INLET PORT COVER
1	MUNCASTER6.1-1-19-NAME PLATE
1	MUNCASTER6.1-2-01A-CRANKSHAFT-PART-1
2	MUNCASTER6.1-2-01B-CRANKSHAFT-PART-2
1	MUNCASTER6.1-2-01C-CRANKSHAFT-PART-3
1	MUNCASTER6.1-2-01D-CRANKSHAFT-PART-4
4	MUNCASTER6.1-2-01E-CRANKSHAFT-PART-5
1	MUNCASTER6.1-2-02-FLYWHEEL
1	MUNCASTER6.1-2-03-ECCENTRIC SHEAVE
2	MUNCASTER6.1-2-04-PISTON+CROSSHEAD
2	MUNCASTER6.1-2-05-CON-ROD
2	MUNCASTER6.1-2-06-SLIDE VALVE+SPINDLE
2	MUNCASTER6.1-2-07-ECCENTRIC STRAP
6	MUNCASTER6.1-M3 DOME NUT
2	MUNCASTER6.1-M3 WASHER
4	MUNCASTER6.1-M3x5 GRUB SREW
2	MUNCASTER6.1-M3x8 HEX BOLT
4	MUNCASTER6.1-M3x20 HEX BOLT
2	MUNCASTER6.1-M4 WASHER-LARGE
2	MUNCASTER6.1-M4x10 HEX BOLT
28	MUNCASTER6.1-M4x12 HEX BOLT
12	MUNCASTER6.1-M4x14 HEX BOLT
12	MUNCASTER6.1-M4x18 HEX BOLT
8	MUNCASTER6.1-M4x24 HEX BOLT
4	MUNCASTER6.1-M5 DOME NUT
6	MUNCASTER6.1-M5 NUT
4	MUNCASTER6.1-M5x30 HEX BOLT
4	MUNCASTER6.1-M5x35 HEX BOLT
7	MUNCASTER6.1-M6 DOME NUT
4	MUNCASTER6.1-M6 NUT
2	MUNCASTER6.1-M6 WASHER
8	MUNCASTER6.1-M6x14 HEX BOLT
4	MUNCASTER6.1-M6x18 HEX BOLT